

PRICELIST 2023

QUALITY AIRTIGHT SYSTEM




ISOCELL

WWW.ISOCELL.COM


CONTENT

| | | |
|--------------------------------------|---|---------|
| ROOF UNDERLAYS | for constructions (exterior) | 4 - 8 |
| | Accessoires | 10 - 15 |
| WIND SEALS AND FACADE LININGS | for wall constructions (exterior) | 18 - 19 |
| | Accessoires | 19 - 20 |
| VAPOUR RETARDERS + AIR SEALS | for roof/wall constructions (indoors) | 22 - 26 |
| BONDING TECHNOLOGY + SEALING SYSTEMS | universal area of application | 28 - 33 |
| | For openings / penetrations | 34 - 37 |
| | For windows | 38 - 41 |
| | For corners and connections (e.g. thresholds) | 42 - 45 |
| | Accessoires | 46 - 47 |
| | Joint | 48 - 49 |
| | For connections / primer / cleaning agent | 50 - 51 |
| | Seal for outdoor use | 52 - 55 |
| | Building Seals from Trelleborg | 56 - 57 |
| PRODUCTS FOR VIBRATION ISOLATION | | 58 - 59 |
| SEALING SYSTEM - SEAL | | 60 |
| TRANSPORT AND WEATHER PROTECTION | | 61 - 63 |

ROOF UNDERLAYS

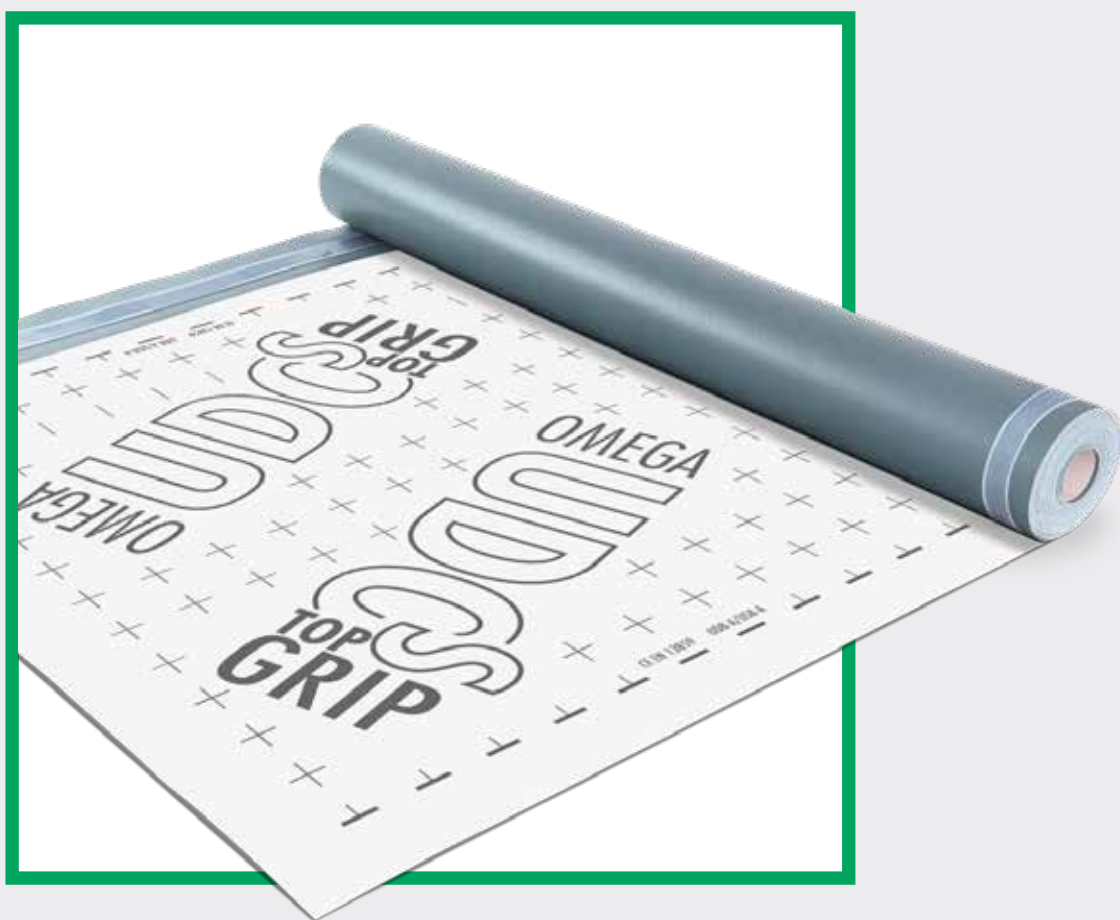

ISOCELL

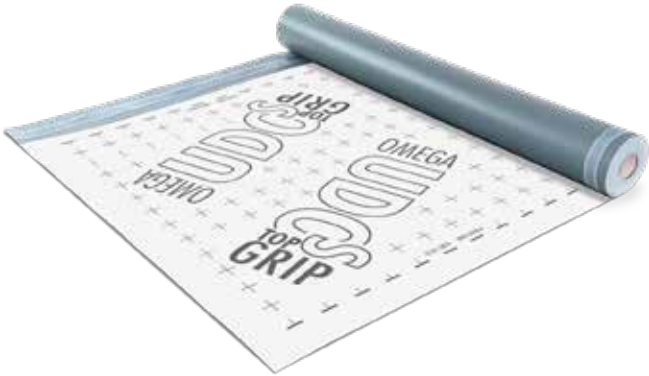

OMEGA UDOs 330 TopGrip Roof Underlay

Vapour-permeable and weldable membrane for underroofs with increased rainproofing in accordance with ÖNORM B 4119. Carries the Swiss seal of approval for underroof membranes for building envelopes.

- + WEATHER-PROOF FOR 12 MONTHS' EXPOSURE
- + FOR ROOF PITCH FROM 1.5° (SEAM-WELDING)
- + FOR ROOF PITCH FROM 5° (SK DUO)
- + ANTI-SLIP FLEECE SURFACE

| Weight | sd-value | UV-resistance | Colour |
|----------|----------|---------------|------------|
| 420 g/m² | 0,25 m | 12 months | Light grey |

| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|--------|------------|-------------|----------------|------------|-------|------|
| 2TOP | SK DUO | 1,50 m | 30 m | 20 rolls | 900 m² | €/m² | 9,11 |

RECOMMENDED PRODUCTS




OMEGA UDOs 330 Roof Underlay

Vapour open (vapour permeable), weldable roof underlay for very flat underroofs. Prefabricated customisation possible

- + UV STABILITY FOR 5 MONTHS
- + USE FOR ROOF PITCHES STARTING FROM 1,5°
- + EMBOSSED SURFACE

| Weight | sd-value | UV-resistance | Colour |
|----------|----------|---------------|------------|
| 330 g/m² | 0,18 m | 5 months | Light grey |

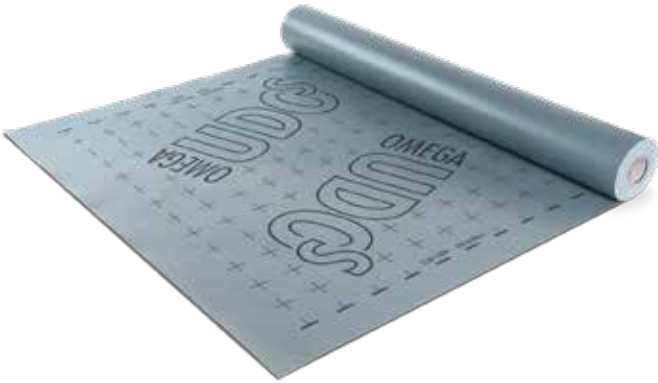

| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|---------------|------------|-------------|----------------|------------|-------|------|
| 2OMSTG | Standard | 1,50 m | 30 m | 40 rolls | 1.800 m² | €/m² | 7,79 |
| 2OMST3G | Standard | 3,00 m | 30 m | 20 rolls | 1.800 m² | €/m² | 7,89 |
| 2OMSTV | Prefabricated | | | | | €/m² | 9,65 |

RECOMMENDED PRODUCTS





OMEGA MONOTOP 330 Roof Underlay

Vapour permeable roof underlay for roofs where there is an increased need for raintightness in accordance with ÖNORM B 4119. Use for roof pitches starting from 5°.

- + OUTDOOR EXPOSURE UP TO 6 MONTHS
- + ANTI-SLIP AND STABLE WITH TWO INTEGRATED ADHESIVE STRIPES
- + EASIER TO PROCESS
- + NO WAVE FORMATION

| Weight | sd-value | UV-resistance | Colour |
|----------------------|----------|---------------|-----------|
| 330 g/m ² | 0,15 m | 6 months | Dark grey |

| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|--------|------------|-------------|----------------|--------------------|------------------|------|
| 2OM330P | SK DUO | 1,50 m | 25 m | 24 rolls | 900 m ² | €/m ² | 6,99 |

RECOMMENDED PRODUCTS



OMEGA QUILLI Sealing Compound



AIRSTOP FROZEN Adhesive Paste



OMEGA NDB Nail Sealing Tape DSK



OMEGA NDB Nail Sealing Tape ESK



PE NDB Nail Sealing Tape DSK



OMEGA MONO 230 Roof Underlay

A non-vapour retardant roof underlay for installation directly on the thermal insulation or the wood sheathing. In accordance with ÖNORM B 4119, the roof underlay is suitable for rainproof under-roofs as well as for under-roofs with increased rainproof properties with a roof pitch of > 15° and a snow load of up to 4.0 kN/m².

- + UV STABLE AND TIGHT AGAINST DRIVING RAIN

| Weight | sd-value | UV-resistance | Colour |
|----------------------|----------|---------------|-----------|
| 230 g/m ² | 0,08 m | 12 weeks | Lightgrey |

| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|--------|------------|-------------|----------------|----------------------|------------------|------|
| 2MONO230SKS | SK DUO | 1,50 m | 50 m | 20 rolls | 1.500 m ² | €/m ² | 4,98 |
| 2MONO230 | SK DUO | 3,00 m | 50 m | 20 rolls | 3.000 m ² | €/m ² | 5,29 |

RECOMMENDED PRODUCTS



OMEGA QUILLI Sealing Compound



AIRSTOP FROZEN Adhesive Paste




OMEGA NDB Nail Sealing Tape DSK



OMEGA NDB Nail Sealing Tape ESK



PE NDB Nail Sealing Tape DSK

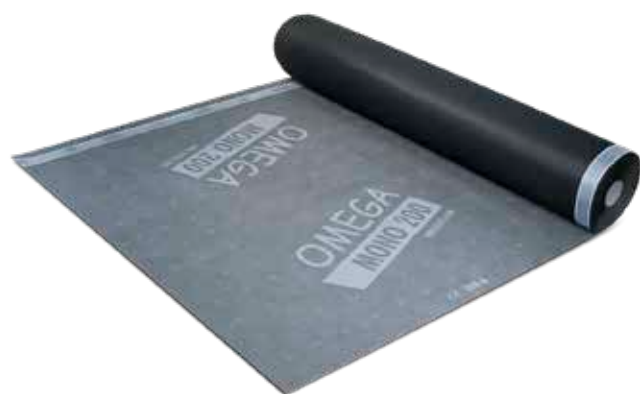

OMEGA MONO 200 Roof Underlay


A vapour permeable roof underlay for installation directly onto the face of the thermal insulation or wood sheathing. Monolithic membrane.

+ UV-STABLE AND TIGHT AGAINST DRIVING RAIN


| Weight | sd-value | UV-resistance | Colour |
|----------------------|----------|---------------|--------|
| 200 g/m ² | 0,1 m | 12 weeks | Grey |

| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|----------|------------|-------------|----------------|----------------------|------------------|------|
| 2MONO200 | Standard | 1,50 m | 50 m | 20 rolls | 1.500 m ² | €/m ² | 3,81 |
| 2MONO200W | SK DUO | 1,50 m | 50 m | 20 rolls | 1.500 m ² | €/m ² | 4,49 |


RECOMMENDED PRODUCTS




OMEGA QUILLI Sealing Compound




AIRSTOP FROZEN Adhesive Paste



OMEGA NDB Nail Sealing Tape DSK



OMEGA NDB Nail Sealing Tape ESK



PE NDB Nail Sealing Tape DSK



OMEGA 180 Roof Underlay


Vapour permeable roof underlay for installation directly onto the face of the thermal insulation or wood sheathing. 3-layer fleece combination.

+ NON-SLIP AND TEAR RESISTANT SURFACE


| Weight | sd-value | UV-resistance | Colour |
|----------------------|----------|---------------|--------|
| 180 g/m ² | 0,03 m | 4 weeks | Grey |

| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|----------|------------|-------------|----------------|----------------------|------------------|------|
| 2OMEGA | Standard | 1,50 m | 50 m | 20 rolls | 1.500 m ² | €/m ² | 2,74 |
| 2OMEGA25 | Standard | 2,50 m | 50 m | 20 rolls | 2.500 m ² | €/m ² | 2,95 |
| 2OMEGA3 | Standard | 3,00 m | 50 m | 20 rolls | 3.000 m ² | €/m ² | 2,95 |
| 2OMEGASKWS | SK DUO | 1,50 m | 50 m | 20 rolls | 1.500 m ² | €/m ² | 3,55 |


RECOMMENDED PRODUCTS




OMEGA QUILLI Sealing Compound




AIRSTOP FROZEN Adhesive Paste



OMEGA NDB Nail Sealing Tape DSK



OMEGA NDB Nail Sealing Tape ESK



PE NDB Nail Sealing Tape DSK

OMEGA LIGHT Roof Underlay

Vapour permeable roof underlay for installation directly onto the face of the thermal insulation or wood sheathing. 3-layer fleece combination.

| Weight | sd-value | UV-resistance | Colour |
|----------|----------|---------------|------------|
| 145 g/m² | 0,03 m | 4 weeks | Anthracite |



| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|----------|------------|-------------|----------------|------------|-------|------|
| 20MELI | Standard | 1,50 m | 50 m | 30 rolls | 2.250 m² | €/m² | 2,54 |
| 2FHDS3 | Standard | 3,00 m | 50 m | 30 rolls | 4.500 m² | €/m² | 2,74 |
| 20MELIPLWS | SK DUO | 1,50 m | 50 m | 30 rolls | 2.250 m² | €/m² | 3,34 |

RECOMMENDED PRODUCTS



OMEGA QUILLI Sealing Compound



AIRSTOP FROZEN Adhesive Paste



OMEGA NDB Nail Sealing Tape DSK



OMEGA NDB Nail Sealing Tape ESK



PE NDB Nail Sealing Tape DSK

OMEGA 125 Roof underlay

An extremely diffusive underlay for installation directly on the thermal insulation or wood sheathing.

| Weight | sd-value | UV-resistance | Colour |
|----------|----------|---------------|--------|
| 125 g/m² | 0,03 m | 4 weeks | Grey |



| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|----------|------------|-------------|----------------|------------|-------|------|
| 20M125075 | Standard | 0,75 m | 50 m | 60 rolls | 2.250 m² | €/m² | 2,22 |
| 20M125150 | Standard | 1,50 m | 50 m | 36 rolls | 2.700 m² | €/m² | 2,15 |
| 20M125300 | Standard | 3,00 m | 50 m | 30 rolls | 4.500 m² | €/m² | 2,15 |
| 20M125SK1 | SK DUO | 1,50 m | 25 m | 64 rolls | 2.400 m² | €/m² | 2,79 |
| 20M125SK | SK DUO | 1,50 m | 50 m | 36 rolls | 2.700 m² | €/m² | 2,79 |

RECOMMENDED PRODUCTS



OMEGA QUILLI Sealing Compound



AIRSTOP FROZEN Adhesive Paste



AIRSTOP ULTRA Adhesive Tape



AIRSTOP SPRINT Sealant



OMEGA NDB Nail Sealing Tape DSK



OMEGA NDB Nail Sealing Tape ESK



PE NDB Nail Sealing Tape DSK



OMEGA DRAIN PLUS Roof Underlay

An extremely diffusive roof underlay designed for use under metal covering. It is equipped with 3-dimensional polypropylene mesh fabric and is laid directly on the wood sheathing. The mesh fabric protects the sheathing from heat and damage from the metal and guarantees that the underlay is ventilated from above.

+ FOR METAL ROOFING

| Weight | sd-value | UV-resistance | Colour |
|----------------------|----------|---------------|---------------------------------------|
| 450 g/m ² | 0,02 m | 3 months | Light grey fleece / black mesh fabric |

| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------|------------|-------------|----------------|--------------------|------------------|-------|
| 2QDRAINPL | PLUS | 1,50 m | 25 m | 10 rolls | 375 m ² | €/m ² | 11,97 |

RECOMMENDED
PRODUCTS



OMEGA
QUILLI Sealing
Compound



AIRSTOP FROZEN
Adhesive Paste



OMEGA SD10 Vapour Retarder

Weather resistant 3-layer roof sheeting with vapour delaying effect for all insulation on battens. Installation under the insulation layer.

+ FOR OVER-RAFTER INSULATION
+ SOLID
+ NON-SLIP

| Weight | sd-value | UV-resistance | Colour |
|----------------------|----------|---------------|--------|
| 175 g/m ² | 10 m | 2 months | Beige |

| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|----------|------------|-------------|----------------|----------------------|------------------|------|
| 2OMDB | Standard | 1,50 m | 50 m | 20 rolls | 1.500 m ² | €/m ² | 2,90 |
| 2OMDBSK | SK DUO | 1,50 m | 50 m | 20 rolls | 1.500 m ² | €/m ² | 3,73 |
| 2OMDB3SK | SK DUO | 3,00 m | 50 m | 20 rolls | 3.000 m ² | €/m ² | 4,01 |

RECOMMENDED
PRODUCTS



OMEGA
QUILLI Sealing
Compound



AIRSTOP FROZEN
Adhesive Paste



AIRSTOP SPRINT
Sealant



AIRSTOP ULTRA
Adhesive Tape



OMEGA NDB Nail
Sealing Tape DSK




OMEGA NDB Nail
Sealing Tape ESK



PE NDB Nail
Sealing Tape DSK

ISOCELL



WWW.ISOCELL.COM



OMEGA QUILLI Sealing Compound

For rain and wind-tight sealing/adhesion of roof membranes at overlaps and joints. Adhesive sealant for sealing nail and staple penetrations in and around the counterbatten. For gluing joints of wood fibreboard, OSB and MDF panels.

Working temperature: from + 7° C

Tested for rain resistance by Holzforschung Austria Nr.: 301/2003/2 - T/HH

| Article number | Content | Packing unit | Colour | Carton content | Price | |
|----------------|---------|--------------|--------|----------------|-------|-------|
| 30MQU310 | 310 ml | cartridge | beige | 20 pieces | €/pc | 12,95 |
| 30MQU900 | 600 ml | foil pack | beige | 20 pieces | €/pc | 25,34 |



OMEGA N55 Adhesive

For windproof and watertight bonding/sealing of UV-resistant façade membranes as well as the bonding/sealing of OMEGA UDOs 330 Roof underlay and OMEGA UDOs 330 TopGrip to each other as well as adhering it to concrete, wood and sheet metal. (Cold Welding effect).

Yield: ~ 25 lfm/kg

Working temperature: from 0 °C

| Article number | Packing unit | Content | Colour | Price | |
|----------------|---------------------------------|---------|-----------|-------|-------|
| 30MN5 | Can | 2 kg | yellowish | €/pc | 43,63 |
| 30MN55 | Can | 4,5 kg | yellowish | €/pc | 95,94 |
| 8FLO5 | OMEGA N55 RFU Bottle for dosing | | | €/pc | 1,84 |



OMEGA QSM Welding Agent

Solution welding compound for homogeneous wind and water-tight welding of OMEGA UDOs 330 Roof underlay.

Yield: ~ 140 lfm/l

Working temperature: from 0 °C

| Article number | Packing unit | Content | Colour | Carton | Price | |
|----------------|-------------------|---------|------------|--------|-------|-------|
| 3QSM | Can | 1 l | colourless | 6 Cans | €/pc | 26,20 |
| 8PIFL | Bottle with brush | | | | €/pc | 23,86 |



OMEGA Alu-Butyl GD2 Conduit Sleeve

For the permanent airtight sealing of penetrations around pipes. For use on sofftfibreboard, concrete, roof underlay etc., indoors and outdoors. If necessary, use a primer!

Working temperature: from + 5 °C

| Article number | Type | Width | Length | for cable entry | Carton content | Price | |
|----------------|------|--------|--------|-----------------|----------------|-------|-------|
| 3AIRGD2A | GD2 | 150 mm | 150 mm | 15 - 20 mm | 30 pieces | €/pc | 9,17 |
| 3AIRGD2TYP2A | GD2 | 150 mm | 150 mm | 25 - 35 mm | 30 pieces | €/pc | 11,00 |
| 3AIRGD2TYP3A | GD2 | 150 mm | 150 mm | 40 - 55 mm | 4 pieces | €/pc | 22,91 |



OMEGA Alu-Butyl RGD Pipe Sleeve

For the permanent airtight sealing of penetrations around pipes. For use on sofftfibreboard, concrete, roof underlay etc., indoors and outdoors. If necessary, use a primer!

Working temperature: from + 5 °C

| Article number | Type | Width | Length | for cable entry | Carton content | Price | |
|----------------|-----------|--------|--------|-----------------|----------------|-------|-------|
| 3OMRGD50A | RGD 50 A | 228 mm | 228 mm | 50 - 70 mm | 4 pieces | €/pc | 20,80 |
| 3OMRGD75A | RGD 75 A | 228 mm | 228 mm | 75 - 90 mm | 4 pieces | €/pc | 26,26 |
| 3OMRGD100A | RGD 100 A | 320 mm | 320 mm | 100 - 110 mm | 4 pieces | €/pc | 29,31 |



OMEGA Alu-Butyl FRGD Flexible Pipe Sleeve

For the permanent airtight sealing of penetrations around pipes. For use on sofftfibreboard, concrete, roof underlay etc., indoors and outdoors. If necessary, use a primer!

For the permanent airtight sealing of penetrations around pipes in roof pitches up to 45°.

Working temperature: from + 5 °C

| Article number | Type | Width | Length | for cable entry | Carton content | Price | |
|----------------|------|--------|--------|-----------------|----------------|-------|-------|
| 3OMFRGD100A | FRGD | 350 mm | 350 mm | 100 - 125 mm | 4 pieces | €/pc | 36,44 |
| 3OMFRGD150A | FRGD | 350 mm | 350 mm | 150 - 165 mm | 4 pieces | €/pc | 45,07 |



Air vents for roof substructure membrane

For safe penetration of roof substructure membrane, for ventilation of roof substructure

| Article number | Diameter | Colour | Carton content | Price | |
|----------------|----------|-------------------|----------------|-------|------|
| 4ES110 | 110 mm | White transparent | 10 pieces | €/pc | 4,69 |



OMEGA UDOs Pipe Sleeve

For permanent sealing of penetrations of the OMEGA UDOs 330 Roof underlay.

- + PERMANENTLY ELASTIC
- + EXTREMELY FLEXIBLE
- + AGE-RESISTANT
- + STRETCHABLE
- + FOR USE FROM DN 90 TO DN 125
- + WELDABLE AND GLUABLE


| Article number | Outer dimension | for cable entry | Carton content | Price | |
|----------------|-----------------|-----------------|----------------|-------|-------|
| 3UDOSM | 225 mm | 90 - 125 mm | 10 pieces | €/pc | 25,65 |



OMEGA UDOs Flexible Pipe Sleeve

Is a ready-made moulded part used especially to quickly achieve wind-tight and water-tight connections of standard pipe penetrations in combination with OMEGA UDOs 330 Roof Underlay and/or OMEGA UDOs 330 SK DUO TopGrip Roof Underlay. Its flexibility and folding technology make OMEGA UDOs Flexible Pipe Sleeve suitable for pipe dimension from DN 110 to DN 125 and roof pitch $\leq 45^\circ$.

| Article number | Outer dimension | for cable entry | Carton content | Price | |
|----------------|-----------------|-----------------|----------------|-------|-------|
| 3UDOSFRM | 310 mm | 110 - 125 mm | 4 pieces | €/pc | 34,00 |

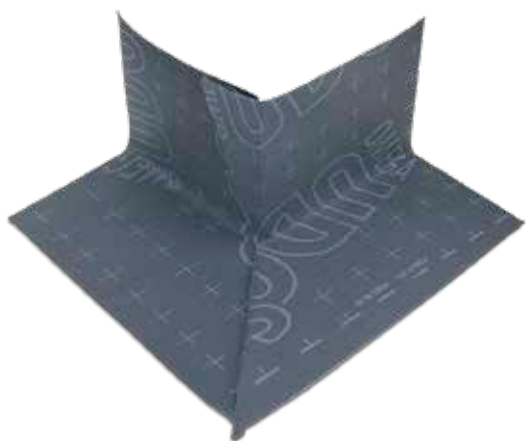

OMEGA UD0s External Angle Moulding

Prefabricated shaped part, which can be used especially for fast wind- and watertight connection of outside corners in combination with the OMEGA UD0s 330 Roof underlay.

- + VAPOUR PERMEABLE
- + HEAT AND SOLVENT WELDABLE
- + WIND, RAIN AND WATER-TIGHT
- + WELDABLE AND BONDABLE

| Article number | Angled corner length | Total width split | Carton content | Price | |
|----------------|----------------------|-------------------|----------------|-------|------|
| 3UDOSA | 200 mm | 150 / 150 mm | 20 pieces | €/pc | 8,08 |



OMEGA UD0s 330 UV Eaves Protection Strip

Long-term solution for protection of OMEGA UD0s 330 Roof Underlay from UV rays in the eaves area.

Connection of OMEGA UD0s 330 Roof Underlay (330 g/m²; UV-resistance 5 months) with UV-resistant PVC (650 g/m²; UV-resistance >10 years).

| Article number | Type | Colour | Roll width | Roll length | Rolls / Pallet | Price | |
|----------------|----------|-----------|------------|-------------|----------------|-------|-------|
| 20MSTUV | Standard | Grey/grey | 0,65 m | 30 m | 30 rolls | €/m | 15,80 |



OMEGA NDB Nail Sealing Tape ESK

ESK = Bitumen tape, adhesive on one side, for sealing nail holes under counter-battens.

Thickness: 2 mm \geq 1,5°DN.
Working temperature: from +5° C

| Article number | Type | Roll width | Roll length | Carton | Price | |
|----------------|------|------------|-------------|----------|-------|------|
| 30MNDI50 | ESK | 50 mm | 10 m | 20 rolls | €/m | 1,29 |
| 30MNDI60 | ESK | 60 mm | 10 m | 16 rolls | €/m | 1,41 |
| 30MNDI70 | ESK | 70 mm | 10 m | 16 rolls | €/m | 1,53 |
| 30MNDI80 | ESK | 80 mm | 10 m | 12 rolls | €/m | 1,63 |



OMEGA NDB Nail Sealing Tape DSK

DSK = Bitumen tape, adhesive on both sides, for sealing nail holes under counter battens.

Thickness: 2 mm \geq 1,5°DN.
Working temperature: from + 5 °C

| Article number | Type | Roll width | Roll length | Carton | Price | |
|----------------|------|------------|-------------|---------|-------|------|
| 3NDB50DSK | DSK | 50 mm | 10 m | 6 rolls | €/m | 1,33 |
| 3NDB60DSK | DSK | 60 mm | 10 m | 6 rolls | €/m | 1,45 |
| 3NDB70DSK | DSK | 70 mm | 10 m | 6 rolls | €/m | 1,57 |
| 3NDB80DSK | DSK | 80 mm | 10 m | 6 rolls | €/m | 1,67 |



PE NDB Nail Sealing Tape DSK

PE foam tape, with adhesive on both sides, for sealing nail holes under counter battens. $\geq 5^{\circ}\text{DN}$. Thickness: 3 mm
Suitable for application using the nail-seal tape dispenser

Working temperature: from + 5 °C

| Article number | Type | Roll width | Roll length | Carton | Price | |
|----------------|------|------------|-------------|---------|-------|------|
| 3PEDIBA603DS | DSK | 60 mm | 30 m | 8 rolls | €/m | 0,54 |
| 3PEDIBA703DS | DSK | 70 mm | 30 m | 7 rolls | €/m | 0,59 |
| 3PEDIBA803DS | DSK | 80 mm | 30 m | 6 rolls | €/m | 0,63 |



PE NDB Nail Sealing Tape ESK

Is a one-sided adhesive PE foam tape that is used as nail-seal tape in the area of the counter battens.
Thickness: 3 mm

Working temperature: from + 5 °C

| Article number | Type | Roll width | Roll length | Carton | Price | |
|----------------|------|------------|-------------|----------|-------|------|
| 3PEDIBA603 | ESK | 60 mm | 30 m | 14 rolls | €/m | 0,32 |
| 3PEDIBA703 | ESK | 70 mm | 30 m | 7 rolls | €/m | 0,34 |
| 3PEDIBA803 | ESK | 80 mm | 20 m | 10 rolls | €/m | 0,41 |





NADIBAX nail sealing tape - dispenser


Quick and straightforward attachment of the nail-seal tape. For all common widths of nail-seal tape up to 80 mm.

- Weight: 6,6 kg
- Space for up to 3 PE rolls
- Batten width and height infinitely adjustable

| Article number | Dimension | for lath width | for lath height | Price | |
|----------------|-----------------|----------------|-----------------|-------|--------|
| 8NDBA2 | 40 x 18 x 60 cm | 50 - 100 mm | 30 - 60 mm | €/pc | 636,99 |

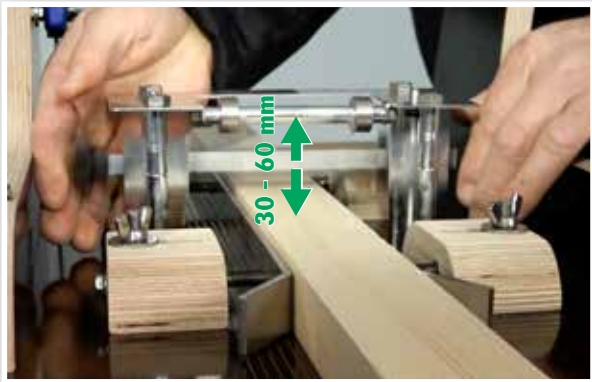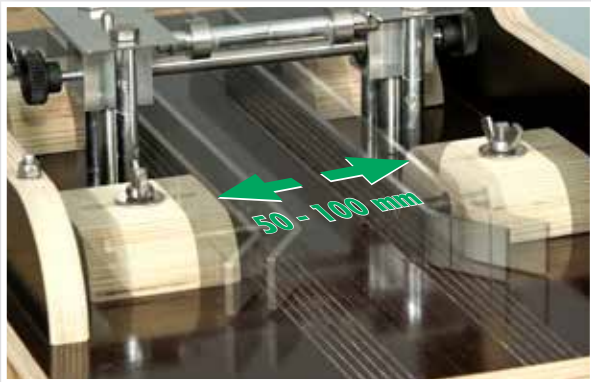

WIND SEALS AND FACADE LININGS

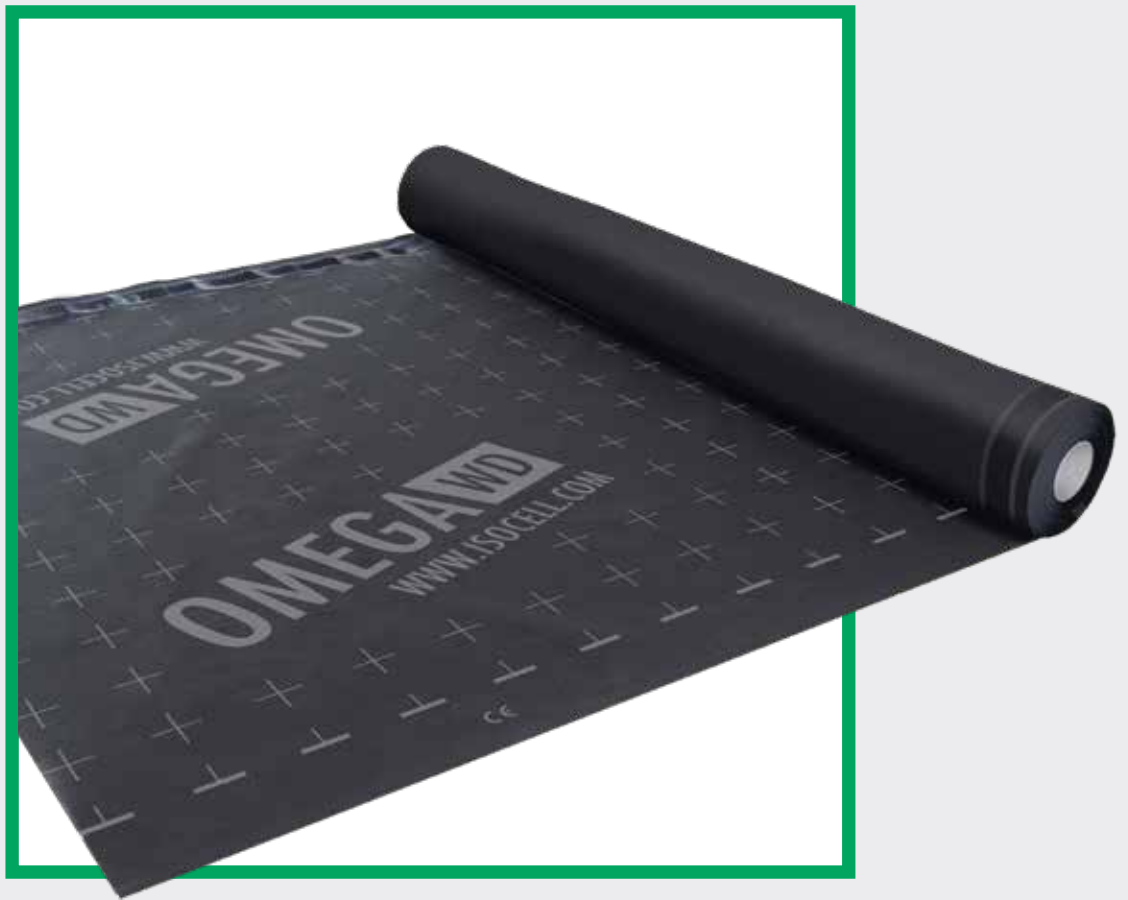

ISOCELL

WIND SEALS AND FACADE LININGS

FOR WALL CONSTRUCTIONS (EXTERIOR)



OMEGA WD Wind Seal

Vapour-permeable, three-layer wind sealing membrane made of structured polypropylene, for installation directly onto the face of the thermal insulation or wood sheathing. Protects the wall makeup and the thermal insulation against moisture and wind.

| Weight | sd-value | UV-resistance | Colour |
|----------------------|----------|---------------|--------|
| 100 g/m ² | 0,02 m | 2 months | Black |

| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|----------|------------|-------------|----------------|----------------------|------------------|------|
| 2WIND | Standard | 1,50 m | 50 m | 30 rolls | 2.250 m ² | €/m ² | 2,04 |
| 2WIND3M | Standard | 3,00 m | 50 m | 30 rolls | 4.500 m ² | €/m ² | 2,15 |
| 2WINDSK | SK DUO | 1,50 m | 50 m | 30 rolls | 2.250 m ² | €/m ² | 2,56 |

RECOMMENDED PRODUCTS



OMEGA QUILLI Sealing Compound



AIRSTOP FROZEN Adhesive Paste



AIRSTOP SPRINT Sealant

OMEGA G20 Facade Lining

UV-resistant facade lining for air gap/cavity ventilated facades with shadow gaps of up to 20mm.

- + FIRE CLASS EN 13501-1: B-S1,D0
- + HIGH QUALITY TPU COATING

| Weight | sd-value | UV-resistance | Colour |
|----------------------|----------|---------------|--------|
| 185 g/m ² | 0,25 m | Durable | Black |



| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|----------|------------|-------------|----------------|----------------------|------------------|------|
| 2OMFA1 | Standard | 1,50 m | 50 m | 30 rolls | 2.250 m ² | €/m ² | 4,34 |
| 2OMFA2 | Standard | 3,00 m | 50 m | 20 rolls | 3.000 m ² | €/m ² | 4,40 |
| 2OMFASK | SK DUO | 1,50 m | 50 m | 30 rolls | 2.250 m ² | €/m ² | 4,52 |

RECOMMENDED PRODUCTS



OMEGA N55 Adhesive



AIRSTOP FROZEN Adhesive Paste



OMEGA UVKB Facade Tape



OMEGA FA GD2 Pipe Sleeve



FASCON EPDM Tape



OMEGA G50 Facade Lining

UV-resistant facade lining for air gap/cavity ventilated facades with shadow gaps of up to 50mm. Larger joint distances require an object-specific approval by ISOCELL.

- + FIRE CLASS EN 13501-1:B-S1,D0
- + HIGH-GRADE TPU COATING

| Weight | sd-value | UV-resistance | Colour |
|----------------------|----------|---------------|--------|
| 225 g/m ² | 0,3 m | Durable | Black |

| Article number | Type | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|----------|------------|-------------|----------------|----------------------|------------------|------|
| 2OMFAS1 | SK DUO | 1,50 m | 50 m | 30 rolls | 2.250 m ² | €/m ² | 6,01 |
| 2OMFAS2 | Standard | 3,00 m | 50 m | 20 rolls | 3.000 m ² | €/m ² | 5,64 |

RECOMMENDED PRODUCTS



OMEGA N55
Adhesive



AIRSTOP FROZEN
Adhesive Paste



OMEGA UVKB
Facade Tape



OMEGA FA GD2
Pipe Sleeve




FASCON EPDM
Tape

OMEGA UVKB Facade Tape

UV-resistant adhesive tape for sealing in and around facades.
Working temperature: from -5 °C



| Article number | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------------|-------------|-------------|---------|-------|------|
| 3OMFA53 | 53 mm | 25 m | - | 8 rolls | €/m | 0,99 |
| 3OMFA60 | 60 mm | 25 m | - | 8 rolls | €/m | 1,24 |
| 3OMFA100 | 100 mm | 25 m | - | 4 rolls | €/m | 1,99 |
| 3OMFA100G | 100 mm | 25 m | 40 / 60 | 4 rolls | €/m | 2,19 |

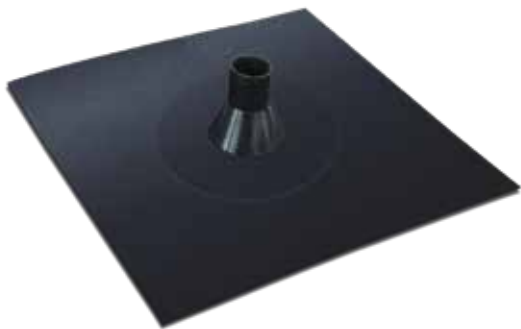

OMEGA FA GD2 Pipe Sleeve

So that façade linings can effectively perform their task as wind-tight elements, they must also be sealed wind-tight in the areas of the pipe sleeves. OMEGA FA GD2 pipe sleeves, bonded wind-tight with ageing-resistant sealing plasters, guarantee that the construction is wind-tight. The black, UV-resistant surface of the OMEGA FA GD2 pipe sleeve corresponds to that of the OMEGA G50 and G20 façade linings.

Working temperature: from - 5 °C

| Article number | Type | Outer dimension | for cable entry | Carton content | Price | |
|----------------|--------|-----------------|-----------------|----------------|-------|------|
| 30MRGD2F | FA GD2 | 150 mm | 15 - 20 mm | 30 pieces | €/pc | 9,30 |



AIRSTOP FROZEN Adhesive Paste

AIRSTOP FROZEN Adhesive Paste is used to join seams of EPDM, AIRSTOP vapour retarders, OMEGA Roof Underlay and Facade Lining and ISOWINDOW Window Tapes. It bonds with most substrates customary in construction, such as wood, metal, stone, concrete, brick, plaster and bituminous surfaces. The adhesive is permanently elastic, watertight and meets the requirements for air and wind tightness of a building envelope according to current standards such as DIN 4108-7.

Working temperature: from - 10 °C

- + PERMANENTLY ELASTIC ADHESIVE JOINT
- + WATERPROOF
- + RESISTANT TO FREEZING

| Article number | Packing unit | Content | Colour | Carton content | Price | |
|----------------|--------------|---------|--------|----------------|-------|-------|
| 3EPDMKL | Foil pack | 600 ml | black | 12 pieces | €/pc | 26,06 |
| 3EPDMKL310 | Cartridge | 310 ml | black | 12 pieces | €/pc | 14,00 |



FASCON EPDM Tape

EPDM tape is particularly suitable for waterproofing constructions and various building components that are exposed to non-pressing water. Thanks to its high resistance to ageing it is also used for façade constructions with back ventilation between façade cladding and sub-structure.

Does not absorb water. UV stable. Thickness: 1.2 mm

| Article number | Roll width | Roll length | Carton | Price | |
|----------------|------------|-------------|---------|-------|------|
| 3EPDMSK80 | 80 mm | 20 m | 8 rolls | €/m | 3,41 |
| 3EPDMSK100 | 100 mm | 20 m | 8 rolls | €/m | 4,18 |
| 3EPDMSK120 | 120 mm | 20 m | 8 rolls | €/m | 5,05 |
| 3EPDMSK140 | 140 mm | 20 m | 4 rolls | €/m | 5,88 |
| 3EPDMSK180 | 180 mm | 20 m | 4 rolls | €/m | 7,33 |

VAPOUR RETARDERS + AIR SEALS



ISOCELL

AIRSTOP DIVA Vapour Retarder

Moisture-variable vapour retarder for use in the air-tight layer. Functional membrane changes its diffusion resistance depending on the current humidity. See our product data sheet!

+ HIGH SD-VALUE RANGE

| Weight | sd-value | Colour |
|---------|------------|-----------------------------------|
| 86 g/m² | 0,5 - 30 m | Transparent white with blue print |

| Article number | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|----------------|------------|-------|------|
| 2DIVA3 | 3,00 m | 100 m | 16 rolls | 4.800 m² | €/m² | 4,59 |
| 2DIVA320 | 3,20 m | 100 m | 16 rolls | 5.120 m² | €/m² | 4,59 |
| 2DIVA32 | 3,20 m | 40 m | 20 rolls | 2.560 m² | €/m² | 4,59 |

RECOMMENDED PRODUCTS



AIRSTOP DIVA+ Vapour Retarder fabric-reinforced

Moisture-variable, fabric-reinforced vapour retarder for use in the air-tight layer. High back-drying potential with adequate sun exposure. See our product data sheet!

+ HIGH SD-VALUE RANGE

+ TEARPROOF

| Weight | sd-value | Colour |
|----------|------------|-----------------------------------|
| 110 g/m² | 0,5 - 30 m | Transparent white with blue print |

| Article number | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|----------------|------------|-------|------|
| 2DIVAGV | 1,50 m | 50 m | 24 rolls | 1.800 m² | €/m² | 4,58 |
| 2DIVAGV3 | 3,00 m | 50 m | 30 rolls | 4.500 m² | €/m² | 4,64 |

RECOMMENDED PRODUCTS





FH FORTE Fleece Vapour Retarder

is a supple vapour barrier for the airtight layer in roof, ceiling and wall construction. FH FORTE Fleece Vapour Retarder is generally for use in construction components that are vapour-permeable on the outside.

+ FOR SUB-TOP USE IN REFURBISHMENT

| Weight | sd-value | Colour |
|----------------------|----------|-------------------|
| 120 g/m ² | 2 m | White transparent |

| Article number | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|----------------|----------------------|------------------|------|
| 2FHFVDB | 1,50 m | 50 m | 30 rolls | 2.250 m ² | €/m ² | 2,02 |
| 2FHFVDB3 | 3,00 m | 50 m | 30 rolls | 4.500 m ² | €/m ² | 2,02 |

RECOMMENDED PRODUCTS



ÖKO NATUR Vapour Retarder fabric-reinforced

Used as a vapour retarder and airtight layer on wall and roof constructions. High tear resistance due to its integrated fabric mesh reinforcement.

- + ECOLOGICAL
- + VERY ROBUST
- + PAPER VAPOUR BARRIER

| Weight | sd-value | Colour |
|----------------------|----------|-----------------------------------|
| 175 g/m ² | 6,45 m | Brown / white, with green imprint |

| Article number | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|----------------|----------------------|------------------|------|
| 2ISONDBFV1 | 1,00 m | 50 m | 48 rolls | 2.400 m ² | €/m ² | 2,23 |
| 2ISONDBFV | 1,50 m | 50 m | 30 rolls | 2.250 m ² | €/m ² | 2,23 |
| 2ISOFHN | 3,00 m | 50 m | 24 rolls | 3.600 m ² | €/m ² | 2,49 |

RECOMMENDED PRODUCTS





TIMBERTEX Vapour Retarder

Tear-resistant, recyclable vapour retarder for vapour diffusing roof and wall makeups. Protects the insulation and structure from condensation build up due to controlled diffusion of moisture through the membrane.

- + DESIGNED FOR WOOD CONSTRUCTION
- + TEAR-RESISTANT

| Weight | sd-value | Colour |
|----------------------|----------|--------|
| 100 g/m ² | 10 m | Beige |

| Article number | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|----------------|----------------------|------------------|------|
| 2TTDB75 | 0,75 m | 50 m | 60 rolls | 2.250 m ² | €/m ² | 2,04 |
| 2TTDB15 | 1,50 m | 50 m | 30 rolls | 2.250 m ² | €/m ² | 1,90 |
| 2TTDB3 | 3,00 m | 100 m | 20 rolls | 6.000 m ² | €/m ² | 1,94 |

RECOMMENDED PRODUCTS



TIMBERFLEX
Adhesive Tape



AIRSTOP FLEX
Adhesive Tape



AIRSTOP ELASTO
Adhesive Tape



AIRSTOP SOLO
Adhesive Tape



AIRSTOP SPRINT
Sealant



AIRSTOP FROZEN
Adhesive Paste



AIRSTOP SD18 Vapour Retarder

Transparent, extremely tear-resistant vapour retarder and airtight layer for wall, roof and ceiling constructions.

- + EXTREME ROBUST
- + TRANSPARENT

| Weight | sd-value | Colour |
|---------------------|----------|-------------------------------------|
| 90 g/m ² | 18 m | Transparent grey with green imprint |

| Article number | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|----------------|----------------------|------------------|------|
| 2AIRDB | 1,50 m | 50 m | 45 rolls | 3.375 m ² | €/m ² | 2,31 |
| 2AIRDB3 | 3,00 m | 50 m | 40 rolls | 6.000 m ² | €/m ² | 2,31 |

RECOMMENDED PRODUCTS



AIRSTOP FLEX
Adhesive Tape



AIRSTOP ELASTO
Adhesive Tape



AIRSTOP KB
Adhesive Tape



AIRSTOP SOLO
Adhesive Tape



AIRSTOP SPRINT
Sealant



AIRSTOP FROZEN
Adhesive Paste



AIRSTOP SOLID SD23 Vapour Retarder

Is an extremely tear-resistant vapour retarder for the airtight level in roof and wall constructions.

- + TEARPROOF BECAUSE OF THREAD REINFORCEMENT
- + TRANSPARENT

| Weight | sd-value | Colour |
|----------------------|----------|--------------------------|
| 100 g/m ² | 23 m | White with green imprint |

| Article number | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|----------------|----------------------|------------------|------|
| 2AS150 | 1,50 m | 50 m | 30 rolls | 2.250 m ² | €/m ² | 2,28 |
| 2AS320 | 3,20 m | 50 m | 30 rolls | 4.800 m ² | €/m ² | 2,28 |

RECOMMENDED PRODUCTS



AIRSTOP FLEX
Adhesive Tape



AIRSTOP ELASTO
Adhesive Tape



AIRSTOP KB
Adhesive Tape



AIRSTOP SOLO
Adhesive Tape



AIRSTOP SPRINT
Sealant



AIRSTOP FROZEN
Adhesive Paste



AIRSTOP SD50 Vapour Retarder

Is a vapour retarder for roof and wall constructions.

- + UNIVERSAL AND ECONOMICAL

| Weight | sd-value | Colour |
|---------------------|----------|--------|
| 95 g/m ² | 50 m | White |

| Article number | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|----------------|----------------------|------------------|------|
| 2SD5031050 | 3,10 m | 50 m | 30 rolls | 4.650 m ² | €/m ² | 1,44 |
| 2SD50310100 | 3,10 m | 100 m | 20 rolls | 6.200 m ² | €/m ² | 1,44 |

RECOMMENDED PRODUCTS



AIRSTOP FLEX
Adhesive Tape



AIRSTOP KB
Adhesive Tape



AIRSTOP ELASTO
Adhesive Tape



AIRSTOP SOLO
Adhesive Tape



AIRSTOP SPRINT
Sealant



AIRSTOP FROZEN
Adhesive Paste

AIRSTOP VAP Vapour Retarder

AIRSTOP VAP Vapour Retarder is a high quality polyethylene foil barrier for achieving vapour tight/block layers in wall and roof constructions.

+ OPTIMIZED FOLDING

| Weight | sd-value | Colour |
|----------------------|----------|-------------------|
| 180 g/m ² | 100 m | Green transparent |



| Article number | Roll width | Roll length | Rolls / Pallet | folded to | Total area | Price | |
|----------------|------------|-------------|----------------|-----------|----------------------|------------------|------|
| 2VAP3 | 3,00 m | 50 m | 35 rolls | 1,50 m | 5.250 m ² | €/m ² | 1,65 |
| 2VAP4 | 4,00 m | 25 m | 54 rolls | 1,00 m | 5.400 m ² | €/m ² | 1,65 |
| 2VAP5 | 5,00 m | 25 m | 45 rolls | 1,30 m | 5.625 m ² | €/m ² | 1,65 |

RECOMMENDED PRODUCTS



AIRSTOP 1500 Vapour Barrier

Extremely robust, tear-resistant vapour barrier. Total vapour block/vapour-tight, even under extreme moisture loads such as commercial kitchens. The integrated fleece backing reduces potential surface condensation that can occur under extreme conditions.

+ VAPOUR-TIGHT
+ ROBUST

| Weight | sd-value | Colour |
|----------------------|----------|-----------------------------|
| 270 g/m ² | 1.500 m | Metallic green with imprint |



| Article number | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|----------------|----------------------|------------------|------|
| 2AP1500 | 1,50 m | 50 m | 30 rolls | 2.250 m ² | €/m ² | 4,93 |

RECOMMENDED PRODUCTS



BONDING TECHNOLOGY + SEALING SYSTEMS



ISOCELL



AIRSTOP FLEX Adhesive Tape

Slightly transparent, multi purpose adhesive tape for airtight bonding. With an exceptionally age-resistant adhesive layer. It is suitable for use on almost all surfaces.

Can be plastered over!
Working temperature: from -5° C



| Article number | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------------|-------------|-------------|---------|-------|------|
| 3AFLEX50 | 50 mm | 25 m | - | 8 rolls | €/m | 0,75 |
| 3AFLEX60 | 60 mm | 25 m | - | 8 rolls | €/m | 0,86 |
| 3AFLEX75 | 75 mm | 25 m | 30 / 45 | 4 rolls | €/m | 1,37 |
| 3FLEX100 | 100 mm | 25 m | 50 / 50 | 4 rolls | €/m | 1,57 |
| 3FLEX150 | 150 mm | 25 m | 75 / 75 | 2 rolls | €/m | 2,31 |
| 3FLEX200 | 200 mm | 25 m | 100 / 100 | 2 rolls | €/m | 3,05 |



TIMBERFLEX Adhesive Tape

To guarantee air and wind-tightness for the skin of a construction it must have the appropriate foils or panel materials providing a permanent seal at overlaps, gaps, joints and penetration points. AIRSTOP TIMBERFLEX Sealing Plaster is tear-resistant with adhesive generously applied, and is suitable for a variety of bonding applications.

Can be plastered over!
Working temperature: from -5° C



| Article number | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------------|-------------|-------------|---------|-------|------|
| 3FLEXB60 | 60 mm | 25 m | - | 8 rolls | €/m | 0,86 |
| 3FLEXB100 | 100 mm | 25 m | 50 / 50 | 6 rolls | €/m | 1,57 |
| 3FLEXB150 | 150 mm | 25 m | 75 / 75 | 4 rolls | €/m | 2,31 |
| 3FLEXB200 | 200 mm | 25 m | 100 / 100 | 2 rolls | €/m | 3,05 |
| 3FLEXB300 | 300 mm | 25 m | 150 / 150 | 2 rolls | €/m | 5,20 |

AIRSTOP FLEX FL Adhesive Tape black

AIRSTOP Flex Adhesive Tape FL is slightly expandable, tear-resistant, can be plastered over and painted over, has adhesive generously applied and is suitable for a variety of bonding applications.

Working temperature: from -5 °C



| Article number | Roll width | Roll length | Carton | Price | |
|----------------|------------|-------------|---------|-------|------|
| 3AFLEXS60FL | 60 mm | 25 m | 8 rolls | €/m | 1,27 |

AIRSTOP KB Adhesive Tape

Tear-resistant adhesive tape for airtight sealing. With an exceptionally age-resistant adhesive layer. It is suitable for use on almost all surfaces. Ideally suitable for linear joints.

Working temperature: from -5 °C



| Article number | Roll width | Roll length | Carton | Price | |
|----------------|------------|-------------|---------|-------|------|
| 3AKB50 | 50 mm | 50 m | 8 rolls | €/m | 0,74 |
| 3AKB60 | 60 mm | 50 m | 8 rolls | €/m | 0,84 |
| 3AKB100 | 100 mm | 50 m | 4 rolls | €/m | 1,41 |
| 3AKB150 | 150 mm | 50 m | 2 rolls | €/m | 2,13 |
| 3AKB200 | 200 mm | 50 m | 2 rolls | €/m | 2,85 |



AIRSTOP ELASTO Adhesive Tape

Highly malleable, fabric-reinforced, Pe adhesive tape with a generous high quality acrylate adhesive layer for airtight sealing of overlapped membrane joints and wire and pipe penetrations.

Working temperature: from -5 °C

| Article number | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------------|-------------|-------------|---------|-------|------|
| 3APEL50 | 50 mm | 25 m | - | 7 rolls | €/m | 0,72 |
| 3APEL60 | 60 mm | 25 m | - | 6 rolls | €/m | 0,83 |
| 3APEL60G | 60 mm | 25 m | 30 / 30 | 6 rolls | €/m | 1,15 |
| 3APEL80G | 80 mm | 25 m | 20 / 60 | 4 rolls | €/m | 1,60 |
| 3APEL100 | 100 mm | 25 m | - | 4 rolls | €/m | 1,49 |
| 3APEL100G | 100 mm | 25 m | 50 / 50 | 4 rolls | €/m | 2,16 |
| 3APEL150 | 150 mm | 25 m | - | 2 rolls | €/m | 2,21 |
| 3APEL150G | 150 mm | 25 m | 75 / 75 | 2 rolls | €/m | 2,95 |
| 3APEL200 | 200 mm | 25 m | - | 2 rolls | €/m | 2,74 |
| 3APEL200G | 200 mm | 25 m | 100 / 100 | 2 rolls | €/m | 4,15 |

AIRSTOP ULTRA Adhesive Tape

Slightly malleable fabric-reinforced tape for airtight sealing indoors and outdoors. High proportion of adhesive, can be used for difficult substrates such as PP foils.

Working temperature: from -5 °C



| Article number | Roll width | Roll length | Split liner | Colour | Carton | Price |
|----------------|------------|-------------|-------------|--------|----------|----------|
| 3AIR60 | 60 mm | 40 m | - | white | 10 rolls | €/m 0,91 |
| 3ULTRA | 60 mm | 40 m | - | black | 10 rolls | €/m 0,91 |
| 3ULTRA1 | 100 mm | 40 m | 50 / 50 | black | 6 rolls | €/m 1,64 |
| 3ULTRA2 | 150 mm | 40 m | 75 / 75 | black | 4 rolls | €/m 2,60 |



Double-sided Acryl KB adhesive tape

Double-sided adhesive tape for gaps at overlaps, joints and penetration points.

| Article number | Roll width | Roll length | Carton | Price | |
|----------------|------------|-------------|----------|-------|------|
| 3ACRYL2050 | 20 mm | 50 m | 32 rolls | €/m | 0,33 |
| 3ACRYL4050 | 40 mm | 50 m | 16 rolls | €/m | 0,39 |



AIRSTOP SOLO Adhesive Tape

Slightly stretchable adhesive tape for airtight bonding. Special carrier with high-quality acrylate adhesive coating.

Working temperature: from -5 °C

- + EASY TO TEAR
- + LINER-FREE
- + QUICK TO PROCESS
- + NO DISPOSAL TIME



| Article number | Roll width | Roll length | Carton | Price | |
|----------------|------------|-------------|----------|-------|------|
| 3ASOLO60 | 60 mm | 50 m | 10 rolls | €/m | 1,04 |
| 3ASOLO100 | 100 mm | 50 m | 6 rolls | €/m | 1,96 |



AIRSTOP CoPli Adhesive Tape

AIRSTOP CoPli is a pre-folded adhesive tape for permanent airtight adhesion at purlins and rafters, as well as corners and edges. Pre-folding enables easy, very quick and reliable application.

- + CAN BE PLASTERED AND PAINTED OVER
- + FAST APPLICATION IN CORNERS AND AT EDGES

| Article number | Roll width | Roll length | Folding | Carton | Price | |
|----------------|------------|-------------|---------|---------|-------|------|
| 3ACOPLI | 60 mm | 25 m | 30 / 30 | 7 rolls | €/m | 1,79 |



AIRSTOP DIMAROLL

Sealant that is used in the same way as an adhesive tape. For the permanently elastic, airtight sealing of intersections and overlaps, as well as of vapour retarders and foils. Can be used to seal membrane perimeters to walls and other substrates.

- + NO WAITING PERIOD
- + BLOWER DOOR TEST IMMEDIATELY POSSIBLE



| Article number | Roll width | Roll length | Carton | Price | |
|----------------|------------|-------------|---------------------|-------|------|
| 3DIMAR | 12 mm | 16 m | 8 rls + 1 Dispenser | €/m | 2,75 |

AIRSTOP SPRINT Sealant

Odourless, quick-drying sealant for permanent elastic sealing of gaps and joints between building components and overlaps of airtight and vapour retarders in drywall constructions e.g. around door and window installations.

Working temperature: from -5° C



| Article number | Content | Packing unit | Colour | Carton content | Price | |
|----------------|---------|--------------|--------|----------------|-------|-------|
| 3SPRINT310 | 310 ml | Cartridge | beige | 20 pieces | €/pc | 10,07 |
| 3SPRINT600 | 600 ml | foil pack | beige | 20 pieces | €/pc | 16,73 |

UNI MS Sealant Adhesive

UV-resistant, permanently elastic, water-resistant MS-polymer based sealant that can be painted over. For sealing and bonding a wide variety of materials throughout the house, indoors and outdoors, such as window joints.

Working temperature: from + 5 °C



- + CONFORMS TO ÖN 5320 AND EN 15651-1 (INDOORS AND OUTDOORS)
- + CLASS 25 LM ACCORDING TO EN ISO 11600

| Article number | Content | Packing unit | Colour | Carton content | Price | |
|----------------|---------|--------------|--------|----------------|-------|-------|
| 3MS310S | 310 ml | Cartridge | black | 20 pieces | €/pc | 11,04 |
| 3MS290 | 310 ml | Cartridge | white | 20 pieces | €/pc | 11,04 |
| 3MS600S | 600 ml | Hose | black | 20 pieces | €/pc | 20,59 |
| 3MS600W | 600 ml | Hose | white | 20 pieces | €/pc | 20,59 |



AIRSTOP FLEX Sealing Patches

A tear-resistant adhesive patch with adhesive generously applied. Suitable for sealing holes in a variety of substrates, indoors and out. It is suitable for applying to substrates such as plywood, OSB and membranes.

Working temperature: from -5 °C




| Article number | Width | Length | Piece / roll | Carton | Price | |
|----------------|--------|--------|--------------|---------|-------|------|
| 3FLEXPF1 | 180 mm | 180 mm | 222 Stk | 4 rolls | €/pc | 0,71 |
| 3FLEXPF2 | 200 mm | 200 mm | 200 Stk | 4 rolls | €/pc | 0,87 |

TIMBERFLEX Sealing Patches

The TIMBERFLEX Sealing plaster patches in wood optics are a tear-resistant adhesive patch with adhesive generously applied. Suitable for quick sealing of holes. The patches are numbered in ascending order.

Working temperature: from -5° C

+ TIMBERFLEX SEALING PLASTER PATCHES IN WOOD OPTICS

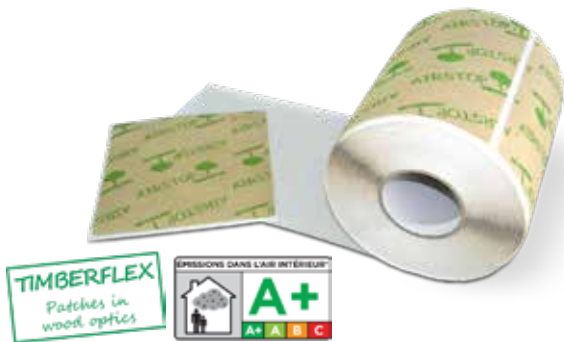

| Article number | Width | Length | Piece / roll | Carton | Price | |
|----------------|--------|--------|--------------|---------|-------|------|
| 3VLIESPF2 | 200 mm | 200 mm | 200 Stk | 4 rolls | €/pc | 0,87 |

AIRSTOP ELASTO Sealing Patches

Suitable for quick sealing of injection holes.

Working temperature: from -5 °C



| Article number | Width | Length | Piece / roll | Carton | Price | |
|----------------|--------|--------|--------------|---------|-------|------|
| 3APELDP | 180 mm | 180 mm | 250 Stk | 4 rolls | €/pc | 0,69 |



AIRSTOP D1 Cable Sleeve

For the permanent airtight sealing of cable penetrations. This product is extremely flexible and resistant to ageing.

Working temperature: from -5 °C

| Article number | Type | Width | Length | for cable entry | Carton content | Price | |
|----------------|------|--------|--------|-----------------|----------------|-------|------|
| 3AIRD1K | D1 | 150 mm | 150 mm | 4 - 6 mm | 30 pieces | €/pc | 5,15 |
| 3AIRD1 | D1 | 150 mm | 150 mm | 8 - 12 mm | 30 pieces | €/pc | 5,15 |



AIRSTOP DD3 Cable Sleeve

For the permanent airtight sealing of cable penetrations. This product is extremely flexible and resistant to ageing.

Working temperature: from -5 °C

| Article number | Type | Width | Length | for cable entry | Carton content | Price | |
|----------------|------|--------|--------|-----------------|----------------|-------|------|
| 3AIRDD3K | DD3 | 150 mm | 150 mm | 4 - 6 mm | 30 pieces | €/pc | 5,26 |
| 3AIRDD3 | DD3 | 150 mm | 150 mm | 8 - 12 mm | 30 pieces | €/pc | 5,26 |



AIRSTOP GD2 Conduit Sleeve

For the permanent airtight sealing of penetrations around conduits. This product is extremely flexible and resistant to ageing.

Working temperature: from -5 °C

| Article number | Type | Width | Length | for cable entry | Carton content | Price | |
|----------------|------|--------|--------|-----------------|----------------|-------|-------|
| 3AIRGD2 | GD2 | 150 mm | 150 mm | 15 - 20 mm | 30 pieces | €/pc | 5,51 |
| 3AIRGD2TYP2 | GD2 | 150 mm | 150 mm | 25 - 35 mm | 30 pieces | €/pc | 5,93 |
| 3AIRGD2TYP3 | GD2 | 228 mm | 228 mm | 40 - 55 mm | 8 pieces | €/pc | 11,99 |



AIRSTOP RGD Pipe Sleeve

For the permanent airtight sealing of penetrations around pipes. This product is extremely flexible and resistant to ageing.

Working temperature: from -5° C

| Article number | Type | Width | Length | for cable entry | Carton content | Price | |
|----------------|------|--------|--------|-----------------|----------------|-------|-------|
| 3RGD50 | RGD | 228 mm | 228 mm | 50 - 70 mm | 4 pieces | €/pc | 16,12 |
| 3RGD75 | RGD | 228 mm | 228 mm | 75 - 90 mm | 4 pieces | €/pc | 20,13 |
| 3RGD100 | RGD | 320 mm | 320 mm | 100 - 110 mm | 4 pieces | €/pc | 22,54 |
| 3RGD200 | RGD | 420 mm | 420 mm | 200 - 220 mm | 4 pieces | €/pc | 54,61 |



AIRSTOP FRGD Flexible Pipe Sleeve

For the permanent airtight sealing of penetrations around pipes in roof pitches up to 45°. This product is extremely flexible and resistant to ageing.

Working temperature: from - 5 °C

| Article number | Type | Width | Length | for cable entry | Carton content | Price | |
|----------------|------|--------|--------|-----------------|----------------|-------|-------|
| 3FRGD100 | FRGD | 350 mm | 350 mm | 100 - 125 mm | 4 pieces | €/pc | 31,96 |
| 3FRGD150 | FRGD | 350 mm | 350 mm | 150 - 165 mm | 4 pieces | €/pc | 38,37 |



AIRSTOP SDD-2 Socket Seal

The special AIRSTOP Socket Seal enables the reclosable airtight installation of cavity wall electrical sockets in the insulation level. The generously sized adhesive collar is installed directly on the existing airtight levels (vapour retarder, OSB boards).

+ FOR ELECTRICAL INSTALLATIONS WITHOUT ELABORATE SERVICE CAVITY

| Article number | Type | Width | Length | for cable entry | Carton content | Price | |
|----------------|-------|--------|--------|-----------------|----------------|-------|-------|
| 3AIRSDD2 | SDD-2 | 350 mm | 320 mm | 4 - 22 mm | 25 pieces | €/pc | 21,30 |



AIRSTOP SDD-3 Socket Seal

The special AIRSTOP Socket Seal enables the reclosable airtight installation of cavity wall electrical sockets in the insulation level. The generously sized adhesive collar is installed directly on the existing airtight levels (vapour retarder, OSB boards). For triple hollow wall socket combinations.

+ FOR ELECTRICAL INSTALLATIONS WITHOUT ELABORATE SERVICE CAVITY

| Article number | Type | Width | Length | for cable entry | Carton content | Price | |
|----------------|-------|--------|--------|-----------------|----------------|-------|-------|
| 3AIRSDD3 | SDD-3 | 450 mm | 320 mm | 4 - 22 mm | 16 pieces | €/pc | 22,28 |



AIRSTOP SPOTI Sealing Sleeve

Airtight installation of recessed lights to ensure sufficient space for the electrical installation.

The special AIRSTOP SPOTI Sealing Sleeve permits airtight fitting of ceiling lights where there is little room for installation. The generously-sized adhesive cuff is installed directly onto the existing airtight level (vapour retarder, OSB panels). AIRSTOP SPOTI is also highly suited for prefabrication in timber frame and container construction.

| Article number | Dimension | Carton content | Price | |
|----------------|--------------|----------------|-------|-------|
| 3AIRSDD2S | 350 x 320 mm | 25 pieces | €/pc | 15,72 |



AIRSTOP SPOTI LIGHT Sealing Sleeve

Airtight installation of recessed lights to ensure sufficient space for the electrical installation in constructions with exposed beams.

The special AIRSTOP SPOTI LIGHT Sealing Sleeve permits airtight fitting of recessed ceiling lights with over-rafter insulation. The generously-sized hollow sleeve is installed directly onto the existing vapour retarder.

| Article number | Dimension | for cable entry | Carton content | Price | |
|----------------|--------------|-----------------|----------------|-------|-------|
| 3AIRSDD2SLMD | 120 x 200 mm | 4 - 22 mm | 25 pieces | €/pc | 18,13 |



BUTYL Stretch Flex

For the easy, permanent sealing of penetrations such as rafters at wall junctions, chimneys, ventilation pipes and electrical conduits. Highly suitable for sealing of irregular shapes, such as purlins etc. can adapt to any shape.

300 % expandable

Thickness: 2 mm

Working temperature: from +5 °C

- + IDEAL FOR SUBSEQUENT SEALING
- + RENOVATIONS

| Article number | Roll width | Roll length | Carton | Price | |
|----------------|------------|-------------|---------|-------|------|
| 3DEHNFL | 50 mm | 10 m | 6 rolls | €/m | 3,54 |
| 3DEHN8 | 80 mm | 10 m | 4 rolls | €/m | 5,65 |
| 3DEHN1 | 100 mm | 10 m | 4 rolls | €/m | 7,08 |

ISOWINDOW FEBA SOFT ES

The tape consists of a fleece structure that can be plastered over and is coated with a high-performance adhesive. The back is completely adhesive and has split liners. The tape is suitable for bonding to the window assembly.

Can be plastered and painted over.

Working temperature: from -5 °C

- + FINGERLIFT
- + EASY TO DETACH

| Material composition | UV-resistance | Colour |
|--------------------------------------|---------------|---------------------------------|
| Flexible fleece, laminated air-tight | 6 months | White with blue ISOWINDOW print |



| Article number | Type | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------|------------|-------------|-------------|---------|-------|------|
| 3FEBA75E | ES | 75 mm | 25 m | 15 / 60 | 6 rolls | €/m | 1,53 |
| 3FEBA100E | ES | 100 mm | 25 m | 15 / 85 | 4 rolls | €/m | 1,61 |

ISOWINDOW FEBA SOFT WS

The tape consists of a fleece structure that can be plastered over and is coated with a high-performance adhesive. The back is completely adhesive and has split liners. The tape is suitable for bonding to the window assembly.

Can be plastered and painted over.

Working temperature: from -5 °C

- + FINGERLIFT
- + EASY TO DETACH

| Material composition | UV-resistance | Colour |
|--------------------------------------|---------------|--------|
| Flexible fleece, laminated air-tight | 6 months | White |



| Article number | Type | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------|------------|-------------|-------------|---------|-------|------|
| 3FEBA75 | WS | 75 mm | 25 m | 25 / 50 | 6 rolls | €/m | 1,68 |
| 3FEBA100 | WS | 100 mm | 25 m | 35 / 65 | 4 rolls | €/m | 2,25 |



ISOWINDOW UVAU ES

Provides a quick and reliable seal and vapour diffusion permeable seal for window connection joints. The tape consists of highly UV-resistant backing that can be plastered over and painted over and is fully coated with a quality acrylic adhesive.

Can be plastered over.

Working temperature: from -5 °C

- + FINGERLIFT
- + EASY TO DETACH
- + 12 MONTHS UV STABILITY

| Material composition | UV-resistance | Colour |
|----------------------|---------------|-------------------------|
| PP / PU compound | 12 months | Grey with black imprint |

| Article number | Type | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------|------------|-------------|-------------|---------|-------|------|
| 3UVAUSK80 | ES | 80 mm | 25 m | 20 / 60 | 4 rolls | €/m | 1,54 |
| 3UVAUSK100 | ES | 100 mm | 25 m | 20 / 80 | 4 rolls | €/m | 1,63 |



ISOWINDOW UVAU WS

Provides a quick and reliable seal and vapour diffusion permeable seal for window connection joints. The tape consists of highly UV-resistant backing that can be plastered over and painted over and is fully coated with a quality acrylic adhesive.

Can be plastered over.

Working temperature: from -5 °C

- + FINGERLIFT
- + EASY TO DETACH
- + 12 MONATE UV STABILITY

| Material composition | UV-resistance | Colour |
|--------------------------------------|---------------|-------------------------|
| Flexible fleece, laminated air-tight | 12 months | Grey with black imprint |

| Article number | Type | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------|------------|-------------|-------------|---------|-------|------|
| 3UVAUSK80WS | WS | 80 mm | 25 m | 25 / 55 | 4 rolls | €/m | 1,69 |



AIRSTOP WiPli Adhesive Tape

AIRSTOP WiPli is a pre-folded adhesive tape for easy, permanent seals of construction joints at window and door frames.

- + CAN BE PLASTERED AND PAINTED OVER
- + 12 MM PRE-FOLDING WITHOUT LINER ENABLES QUICK APPLICATION

| Material composition | Colour |
|---|--------|
| Non-woven composite of PP, coated with acrylic adhesive | Beige |

| Article number | Roll width | Roll length | Folding | Carton | Price | |
|----------------|------------|-------------|---------|---------|-------|------|
| 3AWIPLI | 60 mm | 25 m | 12 / 48 | 5 rolls | €/m | 1,80 |

AIRSTOP FB Window Tape

Foldable adhesive tape with tear-resistant liners that can be pulled off individually for an easy and effective seal of the air-tight joint at window and corner junctions.

Working temperature: from -5 °C

| Material composition | Colour |
|--|----------------------------------|
| Foldable system adhesive tape with pure acrylate adhesive and three individual pull-off liners | White with green AIRSTOP imprint |




| Article number | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------------|-------------|--------------|----------|-------|------|
| 3AHP75 | 60 mm | 25 m | 15 / 20 / 25 | 10 rolls | €/m | 1,30 |



OMEGA Connection Flange

Seal for window and door elements to floor level in construction. Sealing must be in accordance with ÖNORM B 3691 and/or ÖNORM B 3692 standard.

| Material composition | UV-resistance | Colour |
|--|---------------|-------------------------|
| Butyl adhesive tape with spun-bonded fabric carrier and integrated plastic strip | 4 months | Grey, with white fleece |

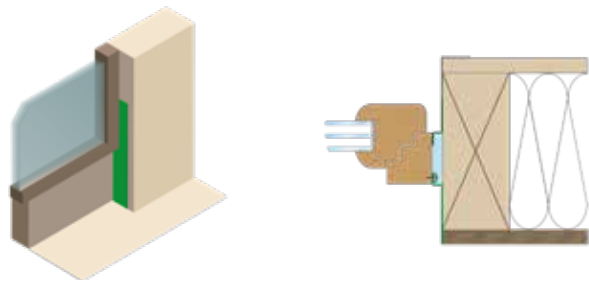

| Article number | Width | Length | Carton content | Price | |
|----------------|--------|--------|----------------|-------|-------|
| 3AIRANFL200 | 200 mm | 300 mm | 10 pieces | €/pc | 19,00 |

ISOWINDOW WZS Soft Cell Foam

Moisture-curing, open cell, single-component foam ideally suited for window installations. Quick and effective airtight, rainproof and vapour open (Vapour permeable) foam for sealing and insulating of joints in building makeups.

Free from CFCS, FCS and HCFCs.

Working temperature: +5 - +30 °C

| Material composition |
|----------------------|
| 1-component PU-foam |



| Article number | Content | Carton content | Price | |
|----------------|---------|----------------|-------|-------|
| 3FOAM | 750 ml | 12 pieces | €/pc | 16,01 |
| 8PISTOLE | Pistol | 1 pieces | €/pc | 35,49 |



OMEGA PLASTO Tape

OMEGA PLASTO Tape is an expandable butyl-rubber tape with a fleece base that can be plastered and painted over. The adhesive area has a split, asymmetrical PE backing. The liner split enables precise application at intersections and in corner areas. Amongst other sealing applications, the adhesive tape is used to make a second drainage level below the window sill.

| Material composition | UV-resistance | Colour |
|---|---------------|-------------------------|
| Butyl-rubber adhesive tape combined with non woven fabric | 4 months | Grey, with white fleece |

| Article number | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------------|-------------|----------------|---------|-------|------|
| 30MPLA75 | 75 mm | 25 m | 30 / 45 | 4 rolls | €/m | 1,77 |
| 30MPLA100 | 100 mm | 25 m | 30 / 70 | 2 rolls | €/m | 2,43 |
| 30MPLA160 | 160 mm | 25 m | 30 / 130 | 2 rolls | €/m | 3,27 |
| 30MPLA200 | 200 mm | 25 m | 30 / 170 | 1 roll | €/m | 4,70 |
| 30MPLA250 | 250 mm | 25 m | 30 / 220 | 1 roll | €/m | 5,65 |
| 30MPLA300 | 300 mm | 20 m | 30 / 120 / 150 | 1 roll | €/m | 6,60 |
| 30MPLA450 | 450 mm | 15 m | 30 / 210 / 210 | 1 roll | €/m | 9,48 |





AIRSTOP BB Bitumen Rubber Tape

Bitumen rubber, permanently elastic with a self-adhesive backing. Particularly suitable for sealing problematic joints between interior steel purlins and plates to concrete walls and concrete substrates. Highly suitable for sealing plywoods, osb, fibreboards and softboards in and around roof junctions, as well as external cornerdetails around window sill areas. Divided backing strip makes it easy to manipulate into and around corners.

Thickness: 1,5 mm Working temperature: from -5 °C

- + PROTECTS SILLS IN TIMBER CONSTRUCTION IN COMPLIANCE WITH DIN 18533
- + BASE SEALING

| Material composition | UV-resistance | Colour |
|---|---------------|--------|
| Bitumen-rubber tape, adhesive on one side | 4 months | Black |

| Article number | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------------|-------------|-------------|----------|-------|-------|
| 3APBB100 | 100 mm | 10 m | 50 / 50 | 10 rolls | €/m | 2,97 |
| 3APBB150 | 150 mm | 10 m | 75 / 75 | 6 rolls | €/m | 4,23 |
| 3APBB200 | 200 mm | 10 m | 100 / 100 | 5 rolls | €/m | 5,50 |
| 3APBB300 | 300 mm | 10 m | 150 / 150 | 1 roll | €/m | 7,97 |
| 3APBB500 | 500 mm | 10 m | 250 / 250 | 1 roll | €/m | 13,74 |
| 3APBB950 | 950 mm | 10 m | 475 / 475 | 1 roll | €/m | 26,50 |



AIRSTOP VBB Fleece Bitumen Rubber Tape

AIRSTOP VBB Bitumen Rubber Tape has excellent adhesive properties on a variety of substrates and is used especially to seal problematic joints between sills and concrete surfaces. It is also suitable for sealing butt joints, penetrations, valleys and flashing troughs in roof constructions, particularly with DHF (non-vapour retardant wood fibre board) panels and soft board panels.

Thickness: 1,5 mm Working temperature: from -5 °C

- + ACCEPTS FILLERS OR ADHESIVES
- + BASE SEALING
- + CAN BE PLASTED OVER

| Material composition | UV-resistance | Colour |
|---|---------------|--------|
| Bitumen rubber tape, adhesive on one side with fleece coating on upper side | 4 months | Black |

| Article number | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------------|-------------|-------------|----------|-------|-------|
| 3APVBB100 | 100 mm | 10 m | 50 / 50 | 10 rolls | €/m | 3,09 |
| 3APVBB200 | 200 mm | 10 m | 100 / 100 | 5 rolls | €/m | 5,61 |
| 3APVBB300 | 300 mm | 10 m | 150 / 150 | 1 roll | €/m | 8,08 |
| 3APVBB500 | 500 mm | 10 m | 300 / 200 | 1 roll | €/m | 13,85 |



OMEGA DB Sealing Tape

Highly flexible and robust sealing tape, adhesive on one side. Particularly suitable for seals in and around internal doorstep thresholds.

Thickness: 1,5 mm

Working temperature: from -5 °C

| Material composition | Colour |
|---|--------|
| Bitumen tape, adhesive on one side, very flexible | Black |

| Article number | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------------|-------------|-------------|----------|-------|------|
| 30MDI100 | 100 mm | 10 m | 50 / 50 | 10 rolls | €/m | 2,82 |
| 30MDI150 | 150 mm | 10 m | 75 / 75 | 6 rolls | €/m | 3,28 |
| 30MDI200 | 200 mm | 10 m | 100 / 100 | 5 rolls | €/m | 3,74 |
| 30MDI300 | 300 mm | 10 m | 150 / 150 | 1 roll | €/m | 5,25 |



OMEGA AB Aluminium Tape

Bitumen rubber, permanently elastic with a self-adhesive backing. Particularly suitable for sealing problematic joints between interior steel purlins and plates to concrete walls and concrete substrates. Highly suitable for sealing plywoods, osb, fibreboards and softboards in and around roof junctions, as well as external corner details around window sill areas. Divided backing strip makes it easy to manipulate into and around corners.

Thickness: 1,5 mm

Working temperature: from -5 °C

+ PERMANENTLY UV STABLE

| Material composition | UV-resistance | Colour |
|--|---------------|--------------|
| ALU/ PETP composite/ elastomer bitumen | durable | Silver/black |

| Article number | Roll width | Roll length | Split liner | Carton | Price | |
|----------------|------------|-------------|-------------|----------|-------|------|
| 30MAL50 | 50 mm | 10 m | - | 12 rolls | €/m | 1,95 |
| 30MAL100 | 100 mm | 10 m | 50 / 50 | 6 rolls | €/m | 3,74 |
| 30MAL150 | 150 mm | 10 m | 75 / 75 | 4 rolls | €/m | 4,22 |
| 30MAL200 | 200 mm | 10 m | 100 / 100 | 3 rolls | €/m | 4,69 |
| 30MAL300 | 300 mm | 10 m | 150 / 150 | 2 rolls | €/m | 6,18 |



PEMIFO Wall Insulation Membrane

PEMIFO Wall Insulation Membrane with approx. 0.3 mm thickness is a 1-layer plastic membrane.

| Article number | Roll width | Roll length | Carton | Price | |
|----------------|------------|-------------|---------|-------|------|
| 3BAHN2 | 130 mm | 50 m | 8 rolls | €/m | 0,38 |
| 3BAHN6 | 160 mm | 50 m | 8 rolls | €/m | 0,40 |
| 3BAHN1 | 175 mm | 50 m | 8 rolls | €/m | 0,43 |
| 3BAHN7 | 200 mm | 50 m | 8 rolls | €/m | 0,53 |
| 3BAHN | 240 mm | 50 m | 8 rolls | €/m | 0,57 |
| 3BAHN12 | 300 mm | 50 m | 4 rolls | €/m | 0,78 |
| 3BAHN8 | 350 mm | 50 m | 4 rolls | €/m | 0,89 |
| 3BAHN9 | 400 mm | 50 m | 4 rolls | €/m | 1,02 |



AIRSTOP RAK Plastic Squeegee

Pressing aid for the optimal processing of adhesive tapes and pipe sleeves

| Article number | Price | |
|----------------|-------|------|
| 8APR | €/pc | 2,94 |



AIRSTOP ROLL Pressing Roller Conical

38mm wide pressing roller. Suitable for OMEGA UDOs Pipe sleeve, OMEGA UDOs outside corner onto OMEGA UDOs 330 roof underlay.

| Article number | Price | |
|----------------|-------|------|
| 8ROLL2 | €/pc | 2,97 |



AIRSTOP ROLL Pressing Roller

40mm wide pressing roller, made of cellular rubber. Highly suitable for applying even pressure during the application of acrylic adhesive tapes.

| Article number | Price | |
|----------------|-------|------|
| 8ROLL | €/pc | 4,16 |



AIRSTOP HSP Hand Applicator

For application and use with both 310 ml cartridges and 600 ml foil packs.

| Article number | Price | |
|----------------|-------|-------|
| 8HDSF | €/pc | 53,95 |







Compressed Joint Tape BG 1

Pre-compressed, impregnated foam tape for sealing of joints between components, such as around window installations, metal beams and timber wooden panels in timber frame construction. Resistant to wind-driven rain, UV-resistant.

Resistant to driven rain up to 600 Pa.



| Article number |  for joint width |  for joint depth | Designation for ordering | Roll length | Carton | Total length | | |
|----------------|---|---|--------------------------|-------------|----------|--------------|-----|-------|
| | | | | | | | €/m | Price |
| 3BG1102 | 2 - 3 mm | 10 mm | 10 / 2 - 3 | 12,5 m | 30 rolls | 375 m | €/m | 0,49 |
| 3BG1152 | 2 - 3 mm | 15 mm | 15 / 2 - 3 | 12,5 m | 20 rolls | 250 m | €/m | 0,63 |
| 3BG11202 | 2 - 3 mm | 20 mm | 20 / 2 - 3 | 12,5 m | 15 rolls | 187,5 m | €/m | 0,84 |
| 3BG1103 | 3 - 5 mm | 10 mm | 10 / 3 - 5 | 10 m | 30 rolls | 300 m | €/m | 0,82 |
| 3BG1153 | 3 - 5 mm | 15 mm | 15 / 3 - 5 | 10 m | 20 rolls | 200 m | €/m | 1,12 |
| 3BG1203 | 3 - 5 mm | 20 mm | 20 / 3 - 5 | 10 m | 15 rolls | 150 m | €/m | 1,46 |
| 3BG1154 | 4 - 7 mm | 15 mm | 15 / 4 - 7 | 8 m | 20 rolls | 160 m | €/m | 1,26 |
| 3BG1204 | 4 - 7 mm | 20 mm | 20 / 4 - 7 | 8 m | 15 rolls | 120 m | €/m | 1,60 |
| 3BG1254 | 4 - 7 mm | 25 mm | 25 / 4 - 7 | 8 m | 12 rolls | 96 m | €/m | 2,07 |
| 3BG1156 | 6 - 10 mm | 15 mm | 15 / 6 - 10 | 5,6 m | 20 rolls | 112 m | €/m | 1,51 |
| 3BG1206 | 6 - 10 mm | 20 mm | 20 / 6 - 10 | 5,6 m | 15 rolls | 84 m | €/m | 2,03 |
| 3BG1256 | 6 - 10 mm | 25 mm | 25 / 6 - 10 | 5,6 m | 12 rolls | 67,2 m | €/m | 2,51 |
| 3BG1306 | 6 - 10 mm | 30 mm | 30 / 6 - 10 | 5,6 m | 10 rolls | 56 m | €/m | 2,99 |
| 3BG1108 | 8 - 13 mm | 10 mm | 10 / 8 - 13 | 4,3 m | 30 rolls | 129 m | €/m | 1,13 |
| 3BG1208 | 8 - 13 mm | 20 mm | 20 / 8 - 13 | 4,3 m | 15 rolls | 64,5 m | €/m | 2,63 |
| 3BG1258 | 8 - 13 mm | 25 mm | 25 / 8 - 13 | 4,3 m | 12 rolls | 51,6 m | €/m | 3,20 |
| 3BG1308 | 8 - 13 mm | 30 mm | 30 / 8 - 13 | 4,3 m | 10 rolls | 43 m | €/m | 3,92 |
| 3BG12010 | 10 - 16 mm | 20 mm | 20 / 10 - 16 | 3,3 m | 15 rolls | 49,5 m | €/m | 2,95 |
| 3BG12510 | 10 - 16 mm | 25 mm | 25 / 10 - 16 | 3,3 m | 12 rolls | 39,6 m | €/m | 4,39 |
| 3BG13010 | 10 - 16 mm | 30 mm | 30 / 10 - 16 | 3,3 m | 10 rolls | 33 m | €/m | 5,50 |
| 3BG13016 | 16 - 27 mm | 30 mm | 30 / 16 - 27 | 5,2 m | 10 rolls | 52 m | €/m | 8,36 |



ISOWINDOW FSB Foam Joint Tape

A pre-compressed multi-function tape made from soft, permanently elastic fine-pored polyurethane foam, used for sealing predefined gaps (around windows and doors). Conforms to higher sealing standards e.g. in timber frame structures.

Resistant to driven rain up to 600 Pa.

| Article number |  for joint width |  for joint depth | Designation for ordering | Roll length | Carton | Total length | Price | |
|----------------|---|---|--------------------------|-------------|---------|--------------|-------|------|
| 3IWFSB9 | 6 - 16 mm | 60 mm | 58 / 6 - 16 | 8 m | 5 rolls | 40 m | €/m | 4,51 |
| 3IWFSB91 | 6 - 16 mm | 70 mm | 64 / 6 - 16 | 8 m | 4 rolls | 32 m | €/m | 5,47 |
| 3IWFSB92 | 6 - 16 mm | 80 mm | 74 / 6 - 16 | 8 m | 4 rolls | 32 m | €/m | 6,24 |
| 3IWFSB100 | 6 - 16 mm | 90 mm | 84 / 6 - 16 | 8 m | 3 rolls | 24 m | €/m | 7,16 |
| 3IWFSB96 | 6 - 16 mm | 100 mm | 94 / 6 - 16 | 8 m | 4 rolls | 32 m | €/m | 7,78 |
| 3IWFSB93 | 10 - 20 mm | 60 mm | 58 / 10 - 20 | 6 m | 5 rolls | 30 m | €/m | 5,75 |
| 3IWFSB94 | 10 - 20 mm | 70 mm | 64 / 10 - 20 | 6 m | 4 rolls | 24 m | €/m | 6,15 |
| 3IWFSB95 | 10 - 20 mm | 80 mm | 74 / 10 - 20 | 6 m | 4 rolls | 24 m | €/m | 7,68 |
| 3IWFSB101 | 10 - 20 mm | 90 mm | 84 / 10 - 20 | 6 m | 3 rolls | 18 m | €/m | 8,62 |
| 3IWFSB97 | 10 - 20 mm | 100 mm | 94 / 10 - 20 | 6 m | 4 rolls | 24 m | €/m | 9,46 |





BUBI LF Adhesive Primer

High quality solvent-free primer for all acrylic, butyl, bitumen and bitumen rubber tapes. Also for priming EPS and XPS. Forms an adhesive film which bonds to the tapes applied. Self-adhesive.

Yield: Approx. 10 m²/litre

Working temperature from – 10 °C (Air and material) / +5 °C (Primer)

| Article number | Packing unit | Content | Price | |
|----------------|-------------------|---------|-------|--------|
| 3BUBILF | Dosing bottle | 1 kg | €/pc | 25,99 |
| 3BUBILF5 | Pot | 5 kg | €/pc | 116,51 |
| 8ROLL1 | Applicator roller | | €/pc | 1,57 |



UNI Primer

A solvent-based synthetic-resin primer, for preparation of porous substrates such as masonry and concrete to optimise the bond of cold-setting adhesive tapes, and cold self-adhesive roof underlays. Penetrates up to 3mm into the surface. Fast curing.

Particularly recommended in winter!

Yield: Approx. 5 m²/litre

Working temperature: from – 10 °C

| Article number | Packing unit | Content | Price | |
|----------------|--------------|---------|-------|--------|
| 3ALLW1 | Can | 1 l | €/pc | 35,82 |
| 3ALLW5 | Pot | 5 l | €/pc | 123,37 |



UNI SPRAY Primer Spray

To optimise the adhesion of adhesive tapes. Particularly characterised by its fast processing.

Yield: Approx. 50 m at 4 cm width

Working temperature: from -5 °C

| Article number | Content | Carton content | Price | |
|----------------|---------|----------------|-------|-------|
| 3ALLW | 500 ml | 12 pieces | €/pc | 16,42 |



UNI XL Primer Spray

To optimise the adhesion of adhesive tapes. Particularly characterised by its fast processing.

Coverage: 70 - 150 m² / Container

Working temperature: from -5 °C

| Article number | Content | Items / pallet | Price | |
|----------------|---------|----------------|-------|--------|
| 3PRIMDG | 22 l | 16 pieces | €/pc | 420,82 |



Spray Lance

Needed accessory for UNI XL Primer Spray

| Article number | Carton content | Price | |
|----------------|----------------|-------|--------|
| 8PRIMDGZ2 | 1 pieces | €/pc | 211,56 |



Spray Gun

Needed accessory for UNI XL Primer Spray

| Article number | Carton content | Price | |
|----------------|----------------|-------|--------|
| 8PRIMDGZ3 | 1 pieces | €/pc | 188,37 |



Conveyor Hose

Length Tube 3,65 m

needed accessory for UNI XL Primer Spray

| Article number | Carton content | Price | |
|----------------|----------------|-------|--------|
| 8PRIMDGZ5 | 1 pieces | €/pc | 130,65 |



AIRSTOP ADC Cleaning Agent for Adhesives

Cleaning agent with a natural base, for removal of all kinds of adhesive residues.

| Article number | Content | Price | |
|----------------|---------|-------|-------|
| 3AIRLOS | 400 ml | €/pc | 14,10 |

OMEGA PoBit Sealing Compound

SEALING PASTE, PRIMER, CURING ACCELERATOR

Particularly suitable for seamless sealing work at critical spots in the window and door areas, as second water-bearing level below window sills, at Penetration points and as sealant for bases outdoors.

WINDOW AND DOOR AREA

OMEGA PoBit for base sealing even at complex connections

MOISTURE-PRONE ROOMS

Ideal for sealing construction components in moisture-prone rooms

BASE AREA

OMEGA PoBit for base sealing

PENETRATION POINTS

Optimum seal for penetration points on construction components





OMEGA PoBit Sealing Compound

Water-based ready-to use elastomer bitumen sealant for seamless sealing work in window and door area, as second drainage level under window sills, at penetration points and for sealing the base outdoors, as well as masonry waterproofing, in line with standard ÖNORM B 3691 and ÖNORM B 3692. The product is applied using a paintbrush or scraper. Coverage: 1.5 kg / m², depending on thickness of application. Working temperature: from +5 °C.

| Article number | Packing unit | Content | Price | |
|----------------|--------------|---------|-------|-------|
| 30MDMS | | 10 kg | €/kg | 10,55 |



OMEGA PoBit Primer

OMEGA PoBit Primer is used to solidify and to compensate the absorbing properties of old and damaged rendering. The product is also suitable for new plaster when this is crumbling and dusty. It serves as bonding agent and ensures a uniform adhesion. The primer acts in an adhesive and sealing way, even on gypsum plastering, asbestos cement, wood and concrete. Coverage: 1 litre for approx. 5 m²

| Article number | Packing unit | Content | Price | |
|----------------|--------------|---------|-------|--------|
| 30MDMSP | | 5 l | €/pc | 150,23 |



OMEGA PoBit Reinforcement Tape

Reinforcement made of 100% polypropylene fabric. For reinforcement with largersurfaces or component transitions, in combination with the PoBit sealing paste.

| Article number | Roll width | Roll length | Price | |
|----------------|------------|-------------|--------|--------|
| 30MDMSG | 150 mm | 50 m | €/roll | 67,12 |
| 30MDMSGSP2 | 1000 mm | 50 m | €/roll | 247,93 |



OMEGA PoBit Hardening Accelerator

Is exclusively to be mixed with PoBit Sealing Compound and reduces the setting time until hardening at low temperatures.

Consumption: 100g bottle for 10kg PoBit Sealant Compound

| Article number | Packing unit | Content | Price | |
|----------------|--------------|---------|-------|-------|
| 30MDMSHB | | 100 g | €/pc | 17,97 |



OMEGA PoBit Plus Spray Paste

OMEGA PoBit PLUS is a spray-on sealing paste with high adhesive properties on almost all substrates. The sealant can be used against moisture where there is water flowing off freely. It can therefore also be used as a spray-on vapour retarder with the function of an airtight layer.

Working temperature: from + 5 °C

- + PERMANENTLY ELASTIC
- + WATER-TIGHT
- + ADHESIVE ON ALMOST ALL SUBSTRATES
- + CAN BE PASTED OVER AND COVERED
- + UV-RESISTANT

| Article number | Content | Carton | Price | |
|----------------|---------|---------|-------|-------|
| 30MDMSPL | 1,25 kg | 10 Cans | €/pc | 25,37 |



OMEGA PoBit Plus - Spray Gun + 2 Nozzles

Needed accessory for OMEGA PoBit Plus Spray Paste

| Article number | Carton content | Price | |
|----------------|-------------------------|-----------|-------|
| 80MDMSPS | 1 spray gun + 2 nozzles | €/Packing | 40,73 |



OMEGA PoBit Plus Spare Nozzle

Needed accessory for OMEGA PoBit Plus Spray Paste

| Article number | Carton content | Price | |
|----------------|----------------|-----------|-------|
| 80MDMSESD | 6 pieces | €/Packing | 35,42 |



OMEGA LIQUID Sealing Compound

Sealant for indoor and outdoor use and can be applied by brush. The water-based compound is particularly suitable for creating jointless seals in critical spots in window areas, as a second drainage level below window sills, at penetration points and in the outer wall area against pressureless subsiding water; ideal for temporary seals of solid wood elements at wall openings and end - grain areas. OMEGA LIQUID sealing compound bonds with many surfaces such as wood, concrete, aerated concrete, metal, polyester, wallboard, expanded foam panels (EPS, XPS, PUR).

Coverage: 1,5 kg/m² x mm thickness of layer.

Working temperature: ab +5 °C

| Article number | Content | Price | |
|----------------|---------|-------|-------|
| 3ISOL | 7 kg | €/kg | 13,45 |



OMEGA LIQUID Reinforcement Tape

The glass fibre mesh has exceptional strength and resistance to moisture and remains strong and stable making it highly suitable for reinforcing joints when used in combination with OMEGA LIQUID sealing compound.

| Article number | Roll width | Roll length | Price | |
|----------------|------------|-------------|--------|------|
| 3ISOL3 | 50 mm | 25 m | €/roll | 1,31 |

EXAMPLES OF APPLICATIONS FOR OMEGA LIQUID SEALING COMPOUND

WINDOW SILLS

To produce a secondary defence/drainage against condensation and water ingress providing added protection for areas below window sills.

MATERIAL COMBINATIONS

Ideal for creating temporary sealing/protection for joints and details of prefabricated elements for protection against the elements during the construction phase.

PENETRATIONS

Sealing externally around pipe and wall penetrations.

SOLID WOOD ELEMENTS

To temporarily seal and protect sawn timber and end grain against damage from water and moisture absorption during the construction phase.





P-Seal

Used for sealing joints between floor elements and ceiling panels as well as other applications. - Trelleborg

*contains acrylic adhesive tape

| Article number | Type | Roll width | Roll length | Thickness | Carton | Price | |
|----------------|-----------|------------|-------------|-----------|---------|-------|------|
| 3P5 | P 5,5 SK* | 9 mm | 100 m | 5,5 mm | 6 rolls | €/m | 0,74 |
| 3P12 | P 12 | 20 mm | 100 m | 12 mm | 5 rolls | €/m | 1,56 |
| 3P17 | P 17 | 27 mm | 50 m | 17 mm | 3 rolls | €/m | 3,10 |



ST Sealant

Sealing with EPDM cellular rubber offers unique advantages. EPDM rubber seals against moisture, cold, warmth, wind and sound and is water-repellent. Thanks to its closed cells it also has good insulating characteristics and a high resilience and resistance to ageing. - Trelleborg

+ TEST CERTIFICATE FOR USE AS A DAMP PROOF COURSE

| Article number | Roll width | Roll length | Thickness | Carton | Price | |
|----------------|------------|-------------|-----------|----------|-------|-------|
| 3ST100 | 100 mm | 25 m | 10 mm | 10 rolls | €/m | 3,86 |
| 3ST150 | 150 mm | 25 m | 10 mm | 8 rolls | €/m | 4,44 |
| 3ST175 | 175 mm | 25 m | 10 mm | 6 rolls | €/m | 4,84 |
| 3ST200 | 200 mm | 25 m | 10 mm | 6 rolls | €/m | 5,01 |
| 3ST250 | 250 mm | 20 m | 20 mm | 3 rolls | €/m | 11,72 |
| 3ST420 | 420 mm | 20 m | 20 mm | 2 rolls | €/m | 14,44 |



STG Impact Sound Insulation

Reduces contact/impact sound/noise that often arises e.g. in floors, framing (wood/wood, concrete/wood, concrete/concrete) which also spreads as structure-born noise (noise travelling through structural elements such as timber and metal beams). It is installed without nails or pins, but can be glued into position if required. - Trelleborg

| Article number | Type | Roll width | Roll length | Thickness | Carton | Price | |
|----------------|----------|------------|-------------|-----------|---------|-------|------|
| 3STG45 | STG 45 | 45 mm | 50 m | 10 mm | 3 rolls | €/m | 5,48 |
| 3STG50 | STG 50 | 50 mm | 50 m | 5 mm | 4 rolls | €/m | 5,21 |
| 3STG975 | STG 97,5 | 97 mm | 25 m | 5 mm | 4 rolls | €/m | 7,50 |



EPDM Sealing Strip

This is an elastic rubber sealing strip made from EPDM rubber polymer with a low water vapour transmission factor. The sealing strip has a structured surface on both sides for optimum bonding. Thickness 0,80 mm, 1,00 mm und 1,20 mm Bonding with AIRSTOP FROZEN Adhesive Paste

Individual widths from 50 mm - 1,500 mm available on request.

| Article number | Roll width | Roll length | Thickness | Carton | Price | |
|----------------|------------|-------------|-----------|----------|-------|------|
| 3EPDM100 | 100 mm | 20 m | 0,8 mm | 12 rolls | €/m | 1,28 |
| 3EPDM150 | 150 mm | 20 m | 0,8 mm | 8 rolls | €/m | 1,90 |
| 3EPDMD1 | 100 mm | 20 m | 1 mm | 12 rolls | €/m | 1,59 |
| 3EPDM15 | 150 mm | 20 m | 1 mm | 2 rolls | €/m | 2,38 |
| 3EPDM20 | 200 mm | 20 m | 1 mm | 2 rolls | €/m | 3,19 |
| 3EPDM30 | 300 mm | 20 m | 1 mm | 1 roll | €/m | 4,77 |
| 3EPDM3 | 300 mm | 20 m | 1,2 mm | 1 roll | €/m | 5,59 |
| 3EPDM4 | 400 mm | 20 m | 1,2 mm | 1 roll | €/m | 7,46 |
| 3EPDM5 | 500 mm | 20 m | 1,2 mm | 1 roll | €/m | 9,32 |



vibrafoam Vibration Isolation

PURASYS vibrafoam provides effective protection against vibrations and shock. These high-tech PUR elastomers can be used as full surface, point or strip bearings between the structural components matching the relative component geometry or as tailor-made moulded parts. We can offer you 13 standard materials as well as the possibility of producing special types in many colours and thicknesses.

- + RELIABLE VIBRATION PROTECTION FOR A BUILDING
- + IMPROVEMENT OF MARKET VALUE
- + ENHANCED LIFE AND WORKPLACE QUALITY


| Article number | Type | Colour | Static load N/ mm² | Width | Length | Thickness | Price | |
|----------------|---------|--------------|-----------------------|---------|---------|-----------|-------|--------|
| 5VFSD10125 | SD 10 | red | 0,010 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 86,09 |
| 5VFSD16125 | SD 16 | pink | 0,016 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 93,87 |
| 5VFSD26125 | SD 26 | orange | 0,026 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 102,26 |
| 5VFSD40125 | SD 40 | yellow | 0,040 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 148,84 |
| 5VFSD65125 | SD 65 | bright green | 0,065 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 167,26 |
| 5VFSD110125 | SD 110 | green | 0,110 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 176,79 |
| 5VFSD170125 | SD 170 | dark green | 0,170 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 194,78 |
| 5VFSD260125 | SD 260 | petrol | 0,260 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 222,30 |
| 5VFSD400125 | SD 400 | blue | 0,400 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 267,40 |
| 5VFSD650125 | SD 650 | dark blue | 0,650 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 297,68 |
| 5VFSD950125 | SD 950 | dark purple | 0,950 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 359,92 |
| 5VFSD1300125 | SD 1300 | purple | 1,300 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 389,56 |
| 5VFSD1900125 | SD 1900 | bordeaux red | 1,900 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 474,24 |

Price valid for panels. Dimensions cut to size on request.

vibradyn Vibration Isolation




PURASYS vibradyn is a closed-cell elastomer and it is made of a special kind of polyetherurethane. Thanks to its structure, this material absorbs almost no fluids and can therefore be used in pressing groundwater. We can offer you 7 standard materials as well as the possibility of producing special types in many colours and thicknesses.

+ COVERS A WIDER LOAD RANGE

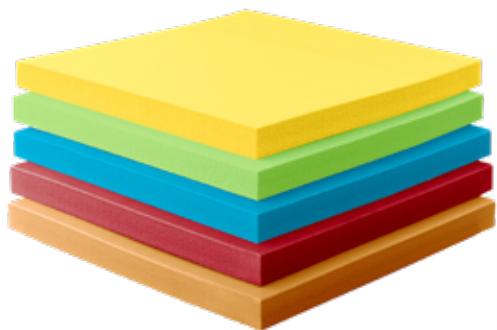

| Article number | Type | Colour | Static load N/ mm² | Width | Length | Thickness | Price | |
|----------------|---------|------------|-----------------------|---------|---------|-----------|-------|----------|
| 5VDS75125 | S 75 | yellow | 0,075 | 500 mm | 2000 mm | 12,5 mm | €/m² | 200,79 |
| 5VDS150125 | S 150 | green | 0,150 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 295,30 |
| 5VDS350125 | S 350 | blue | 0,350 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 383,87 |
| 5VDS750125 | S 750 | red | 0,750 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 476,39 |
| 5VDS1500125 | S 1500 | orange | 1,500 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 496,08 |
| 5VDHL3000125 | HL 3000 | dark blue | 3,000 | 1000 mm | 2000 mm | 12,5 mm | €/m² | 626,02 |
| 5VDHL6000125 | HL 6000 | grey-black | 6,000 | 500 mm | 2000 mm | 12,5 mm | €/m² | 1.072,87 |

Price valid for panels. Dimensions cut to size on request.

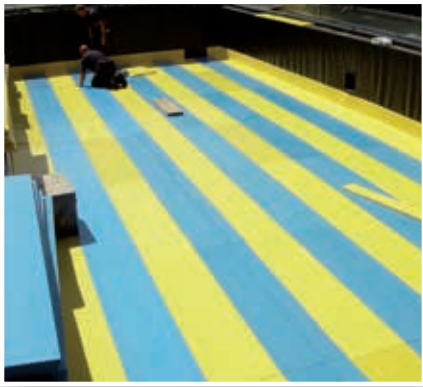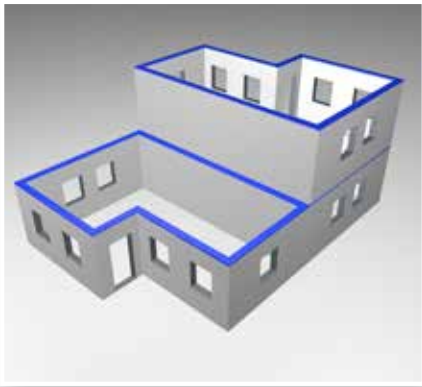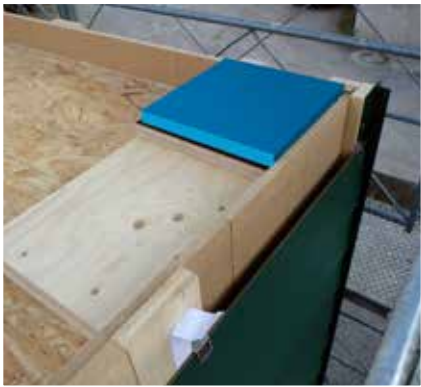



OMEGA SUB Screed Sheeting

Is a high vapour-impermeable moisture and radon barrier. The special multi-layer sheeting consists of a quality corrosion-resistant aluminium layer with fleece reinforcement on both sides. The sheeting was specially developed as damp-proofing for use on floor slabs with ground contact as a protection against ascending moisture in accordance with DIN 18195-4 or on intermediate floors, as vapour barrier above rooms which are subject to a high degree of stress in terms of construction physics. The adhesive backing on both sides permits a quick, clean and tight seam during handling.

- + RESISTANT TO PERFORATION
- + WATERTIGHT
- + RADON-TIGHT

| Article number | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|----------------|------------|-------|------|
| 50MEBR | 1,50 m | 25 m | 40 rolls | 1.500 m² | €/m² | 5,07 |

RECOMMENDED PRODUCTS




AIRSTOP ELASTO
Adhesive Tape



AIRSTOP SOLO
Adhesive Tape



AIRSTOP FROZEN
Adhesive Paste

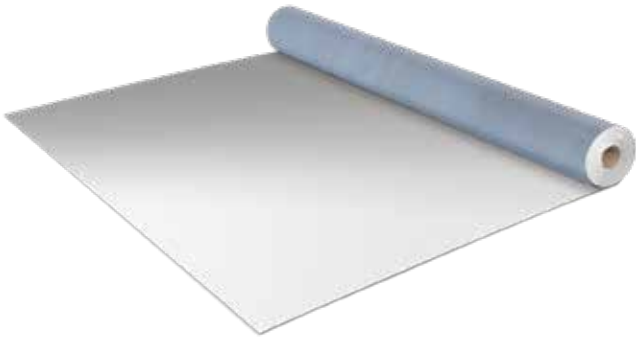

OMEGA ALUBIT SK Vapour Barrier

Cold self-adhesive vapour barrier sheeting and airtight layer for roof constructions. When installed correctly it prevents the penetration of water vapour into the construction. OMEGA ALUBIT SK Vapour Barrier can also be used for a limited time as a temporary seal.

| Article number | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|----------------|------------|-------|-------|
| 30MAB | 1,08 m | 25 m | 24 rolls | 648 m² | €/m² | 10,11 |

RECOMMENDED PRODUCTS




UNI XL Primer
Spray

TIMBER Protect SK

TIMBER Protect SK is a combination of fleece coated with an impermeable membrane on both sides and a specially matched polyacrylic adhesive. The tear-resistant synthetic liner facilitates handling. Construction elements can be bonded together over the entire surface with the wide sheets as protection during transport and the construction period. Joins between sheets can easily be made lengthwise along the marking grid and diagonally with 10 cm overlap.

- + ALL-OVER SELF-ADHESIVE
- + DOUBLE-FUNCTION MEMBRANE
- + OPTIMIZED RE-DRYING OF RESIDUAL MOISTURE IN CONSTRUCTION ELEMENTS
- + VARIABEL DIFFUSION
- + NON-SLIP SAFETY: ANTI-SLIP COATING
- + NO FLEECE ABRASION
- + TRANSPARENT
- + WATERPROOF ADHESIVE

| Weight | sd-value | Thickness |
|----------|---------------|-----------|
| 215 g/m² | 0,28 - 2,68 m | 0,33 mm |

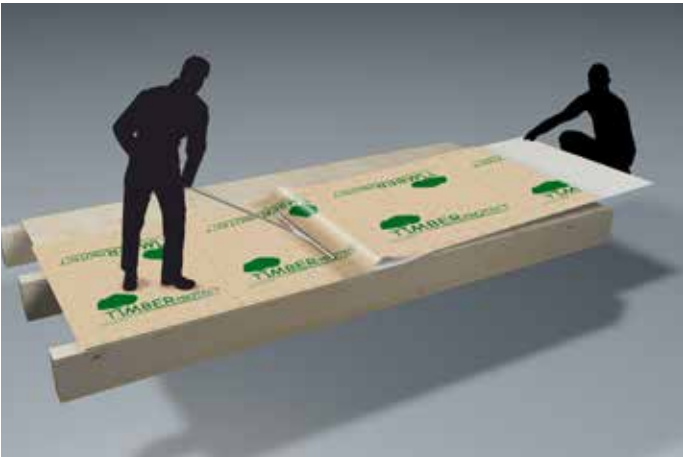

| Article number | Roll width | Roll length | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|----------------|------------|-------|------|
| 3TPBZA | 1,50 m | 50 m | 25 rolls | 1.875 m² | €/m² | 8,12 |

RECOMMENDED PRODUCTS





| Weight | Colour |
|----------------------|--------|
| 135 g/m ² | White |

PE Shrink Wrap

Suitable for flexible packaging of bulky and large objects.

- + RESISTANT TO WIND AND RAIN
- + TRANSPORT REGARDLESS OF WEATHER CONDITIONS
- + REPLACES THE NEED FOR EXPENSIVE STORAGE FACILITIES
- + FAST PACKAGING OF LARGE ITEMS
- + WEATHER PROTECTION

| Article number | Roll width | Roll length | Price | |
|----------------|------------|-------------|------------------|------|
| 2SCHRF02 | 6,50 m | 50 m | €/m ² | 1,16 |
| 2SCHRF01 | 8,50 m | 50 m | €/m ² | 1,16 |



| Weight | Colour |
|----------------------|---------------|
| 190 g/m ² | Black / white |

PE COEX Shrink Wrap

Suitable for flexible packaging of bulky and large objects.

- + RESISTANT TO WIND AND RAIN
- + TRANSPORT REGARDLESS OF WEATHER CONDITIONS
- + REPLACES THE NEED FOR EXPENSIVE STORAGE FACILITIES
- + FAST PACKAGING OF LARGE ITEMS
- + UV-STABILIZED
- + HIGHER MATERIAL STRENGTH
- + GREATER SAFETY
- + OPTIMUM PROTECTION AGAINST SUNLIGHT AND YELLOWING

| Article number | Roll width | Roll length | folded to | Rolls / Pallet | Total area | Price | |
|----------------|------------|-------------|-----------|----------------|----------------------|------------------|------|
| 2SCHRF07 | 6,50 m | 50 m | 1,70 m | 12 rolls | 3.900 m ² | €/m ² | 1,68 |



Hand Shrink Wrap Gun RIPACK 3000

RIPACK 3000 a high-performance shrink gun for shrink packaging of pallets, machines, equipment and other products. The appliance has a robust aluminium body and an aluminium burner head.

Shrink Wrap Gun RIPACK 3000 incl. carry case, 8 m hose + accessories.

Power: 83 kW - energy source: propane gas - consumption: approx. 4.0 kg/h

| Article number | Price | |
|----------------|-------|----------|
| 6HSG2 | €/pc | 1.173,53 |



Arm Support for Hand Shrink Wrap Gun

Pivotable and foldable

| Article number | Price | |
|----------------|-------|--------|
| 6HSG2AS | €/pc | 107,32 |

RIPACK®
RIPACK® Series 3000



Extension for Hand Shrink Wrap Gun

Length: 2,03 m with diffuser

Accessories required: Piezo-igniter for device with extension

| Article number | Price | |
|----------------|-------|--------|
| 6HSG2VL | €/pc | 632,94 |
| 6HSGZ2 | €/pc | 52,94 |



Gas Cylinder Trolley

Excl. 13 kg gas cylinder

| Article number | Price | |
|----------------|-------|--------|
| 6GFW1 | €/pc | 272,06 |



Protective Kevlar Glove

Excellent protection from heat when using the hand shrink-wrap gun.

Size 10, (1 pc.=1 pair)

| Article number | Price | |
|----------------|-------|-------|
| 6WSH2 | €/pc | 47,70 |



WHAT IS ISOCELL?

It is natural thermal insulation made of cellulose fibres. ISOCELL is made by recycling clean, homogeneous newspapers. The base material is therefore wood. The paper, which is supplied already sorted, is broken down into coarse fibres, mixed with mineral salts and ground in a mill. The mineral salts protect ISOCELL from vermin attack and mould as well as making it resistant to rotting and fire.

INSULATION OF PITCHED ROOFS


While loft extensions are typically insulated from inside, attic rooms that are already inhabited can also be refurbished by placing the insulating material above the roof membrane from outside.

INSULATION OF TOP FLOOR

For unused attic spaces, we recommend the simple solution that involves open blowing of ISOCELL, while the Woodyfix system offers a walk-on solution that is similarly free of thermal bridges. Horizontal beam ceilings and flooring can be insulated using either injection or the open blowing procedure.

INSULATION OF WALLS

Cellulose insulation has already been employed for a long time in timber construction for insulating timber frame walls. Builders are increasingly opting for a breathable skin that uses a timber frame construction with ISOCELL cellulose insulation when renovating external walls. Cost-effectiveness, excellent acoustic insulation values and the ability to adapt to uneven surfaces are just three of the many arguments in its favour. Where internal insulation is concerned, ISOCELL scores well with its high capillary conductivity, whether it is applied by spraying, as in the Renocell plastered interior insulating system, or as a timber frame construction clad with panelling materials. In addition to these applications, ISOCELL has also proven its worth as an insulating material for buffer storage, service shafts, vaulted ceilings, e.g. in churches, and as a spray-on visible acoustic insulation.

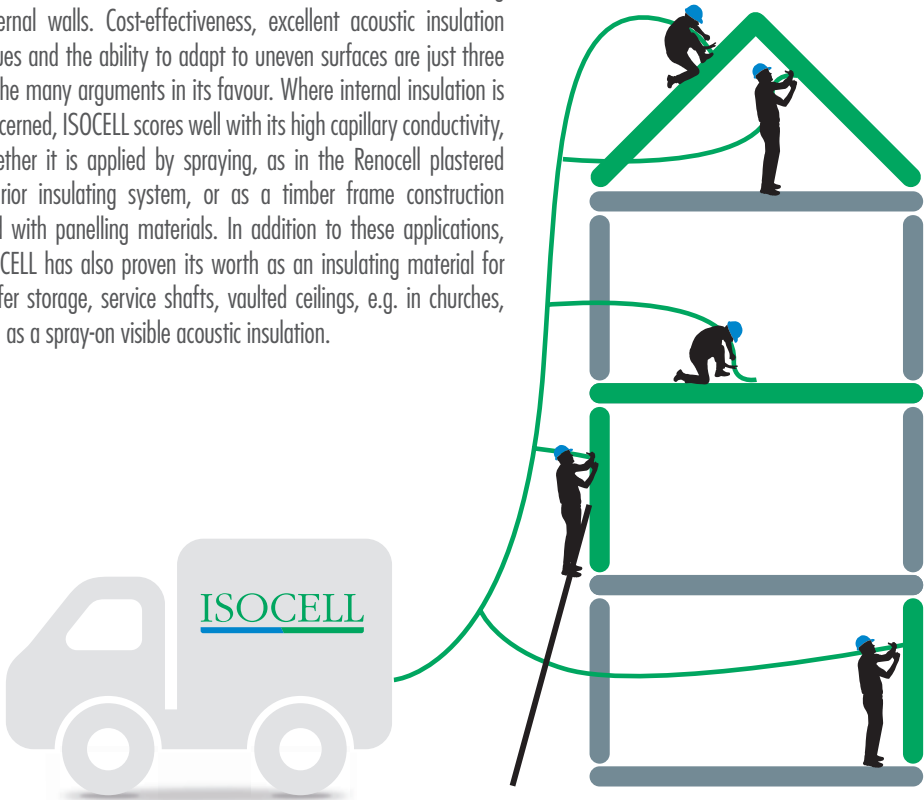



ISOCELL CELLULOSE

ISOCELL cellulose blown-in insulation is a thermal insulation material made of cellulose fibres, which is manufactured from newspaper paper using an optimal recycling method. The base material for ISOCELL is thus wood, whose outstanding properties have been known for thousands of years. ISOCELL cellulose is produced in compliance with the strictest quality criteria in our own plants in Austria, Germany, Belgium, France and Sweden.

WOODYCELL

WOODYCELL is natural insulation material made from wood fibres. It contains no harmful substances or additives of any kind and is pleasantly warm to the touch. The low energy input required in its production makes WOODYCELL unrivalled from an ecological point of view. Insulation for every application, whether it is a new construction, refurbishment, sloping roofs, top storey ceilings, intermediate floors, exterior or interior walls. . .



GRANUBLOW

GRANUBLOW core insulation — ideal insulation material for the subsequent insulation of double-shell masonry.

PLANTACELL

Thermal insulation material made of 100 % wheat straw with no additives at all. ISOCELL Plantacell is suitable for the insulation of roofs, walls and ceiling components. The insulating material is blown into the cavities using the ISOCELL blowing technology and fills them completely.



ISOCELL ACADEMY

ISOCELL has its own training room in Neumarkt am Wallersee for Cellulose processing training and airtightness training as well. Expert meetings also promote the exchange of experience and point the way for the development of new technologies. Granted, I find practice seminars for ISOCELL employees.

The trainer shows live on site how cellulose insulation is immersed in a test object, which techniques should be used and which product variety ISOCELL is offered for it.

The trainees can simply learn how to handle cellulose insulation and blowing machines in a practical way.



BENEFIT FROM OUR EXPERIENCE

Innovative machine technology for the processing of cellulose insulation on the construction site and in prefabrication in timber element construction - tailor-made solutions for every requirement profile.

ISOBLOW blowing machines make the work of the cellulose processor easier and more efficient. Only an excellent cellulose fibre, high-performance blowing machines and user-friendly injection accessories ensure high-quality and rapid processing.

ISOCELL SERVICE AND MAINTENANCE

ISOCELL is your partner - not only for new blowing machines - also for used machines. In our in-house service division we do maintenance and repair of blowing machines (also foreign brands). ISOCELL buys and sells used blowing machines of all types.

A PRODUCT IS ONLY AS GOOD AS ITS PROCESSING

ISOCELL is constantly organizing seminars to train and certify novice and experienced ISOCELL cellulose user. In ISOCELL's training center, models can be used to simulate different constructions and conditions on the construction site and to test new applications. Expert meetings also promote the exchange of experience and are trendsetting in the development of new technologies.



ISOCELL INVESTS IN RESEARCH AND DEVELOPMENT

New applications open up new markets for our customers. Two completed cellulose projects of the program «House of the Future» were carried out in cooperation with University of Technology in Graz and the Technical University Dresden. These had the further development of the cellulose insulation currently used mainly as blowing insulation, to form a load-bearing, plasterable wall system to the content, which can also be used as INSIDE insulation without vapour barrier. Currently, the processing equipment and detail solutions are being developed for this revolutionary technology.



BERNHARD
HEMETSBERGER

+43 6216 4108 360
bernhard.hemetsberger@isocell.at



WILHELM
PAISCHER

+43 6216 4108 44
wilhelm.paischer@isocell.at

TERMS AND CONDITIONS

1. Validity

The following terms of delivery and payment constitute the principal part of every contract entered into with **ISOCELL GmbH & Co KG** now and in the future. Differing general terms and conditions specified by partners of **ISOCELL GmbH & Co KG** are not considered as being included and do apply.

2. Delivery date and deadline

Delivery times and dates are not binding unless expressly declared as 'set dates'. Claims for damages may not be made as a result of delivery delays.

3. Delivery and transfer of risk

The obligation to supply is suspended for such periods as the buyer is in arrears with payment for the product or with payments in connection with other legal transactions. Delivery of the goods is made in the trade packing ex works or branch, for account of and at the risk of the buyer. Transfer of risk takes place when the goods are handed over to the forwarder or when the goods are loaded onto the transport vehicle provided. Transport damage is therefore always the responsibility of the acceptor. Prices agreed as excluding delivery do not include loading charges. After receipt an immediate inspection of the goods must take place to ensure that delivery has been duly carried out and that the goods are conform to their description. Notice of complaints must be given in writing immediately and without delay to avoid loss of title. The packaging material must be disposed of by the customer.

4. Handover

The customer undertakes to comply with the formalities applicable to handover on the construction site or other delivery address. Should none be present the seller has the right to unload the goods on the account of the buyer and at the buyer's risk and to deposit the goods so fulfilling the contract.

5. Payment and price

All prices are subject to change. Payments must always be made within 8 days of date of invoice. Receipt of the invoice has no relevance to the date when the payment is due. If the buyer is in arrears with payment default interest at the rate of interest for an unsecured business loan of at least 11.2% p.a. becomes payable. All costs including out-of court costs for assertion of claims as well as those incurred through a debt collection agency are charged to the customer at the rates set out in these conditions.

6. Proprietary rights and assignment of claims

(1) The following agreed retention of title serves to secure all existing current and future claims of the Seller against the Buyer arising from the supply relationship between the parties to the contract concerning insulation materials supplied, airtight products and machines which process these products (including balance claims from a current account relationship limited to this supply relationship).

(2) The goods delivered by the Seller to the Buyer shall remain the property of the Seller until all secured claims have been paid completely. The goods as well as the goods covered by the retention of title replacing them in accordance with the following provisions shall hereinafter be referred to as «reserved goods».

(3) The Buyer shall store the reserved goods free of charge for the Seller.

(4) The purchaser is entitled to process and sell the reserved goods in the ordinary course of business until the case of enforcement (paragraph 9) has occurred. Pledges and transfers by way of security are not permitted.

(5) If the reserved goods are processed by the Buyer, it is agreed that the processing is carried out in the name and for the account of the Seller as manufacturer and that the Seller directly acquires the ownership or - if the processing is carried out from materials of several owners or the value of the processed object is higher than the value of the reserved goods - the co-ownership (fractional ownership) of the newly created object in the ratio of the value of the reserved goods to the value of the newly created object. In the event that no such acquisition of ownership should occur at the seller, the Buyer already now transfers his future ownership or - in the above ratio - co-ownership of the newly created object to the Seller as security. If the reserved goods are combined or inseparably mixed with other items to form a uniform item and if one of the other items is to be regarded as the main item, the Seller shall assign to the Buyer, to the extent that the main item belongs to him, the proportionate co-ownership of the uniform item in the proportion stated in sentence 1.

(6) In the event of resale of the goods subject to retention of title (as far as material is concerned), the Buyer hereby assigns to the Seller, by way of security, the resulting claim against the purchaser - in the case of co-ownership of the Seller in the goods subject to retention of title pro rata in accordance with the co-ownership share -. The same applies to other claims which take the place of the reserved goods or otherwise arise with regard to the reserved goods, such as insurance claims or claims arising from tort in the event of loss or destruction. The seller revocably legitimates the Buyer to collect the claims assigned to the Seller in his own name. The Seller may only revoke this direct debit authorisation in the case of enforcement.

(7) If third parties have access to the reserved goods, in particular by seizure, the Buyer shall immediately inform them of the Seller's ownership and inform the Seller thereof in order to enable him to enforce his ownership rights. If the third party is not in a position to reimburse the Seller for the judicial or extrajudicial costs incurred in this connection, the Buyer shall be liable to the Seller for such costs.

(8) The Seller shall release the goods subject to retention of title as well as the items or claims replacing them insofar as their value exceeds the amount of the secured claims by more than 50%. The Seller shall be responsible for selecting the items to be released thereafter.

(9) If the seller withdraws from the contract in case of breach of contract by the buyer - in particular default in payment - he shall be entitled to demand the return of the reserved goods.

7. Guidance and instructions for use

Consultancy services provided by **ISOCELL GmbH & Co KG** do not form part of the order and are without exception non-binding. The customer is obliged to request a description of the product and the guidelines for use and to adhere to these specifications during installation of the material supplied. Decisions concerning the use and application of the goods are made at the customer's own risk.

8. Calculation

Indications made by **ISOCELL GmbH & Co KG** relating to quantities or areas for coverage etc. are not contractually binding. Such values may differ considerably due to local conditions, the actual installation, methods of application etc.

9. Warranty and Guarantee

ISOCELL GmbH & Co KG shall provide warranty for duly notified defects within the scope of the guarantee and warranty at its discretion by improvement, exchange for faultless goods, price reduction or also cancellation of the contract and crediting of the purchase price. The customer may only demand a price reduction or rescission after a written additional respite has been set if **ISOCELL GmbH & Co KG** does not carry out an improvement or exchange of goods within a reasonable period of time. All warranty claims of the customer against **ISOCELL GmbH & Co KG** shall expire 2 years after delivery of the goods.

10. Liability and compensation

The liability of **ISOCELL GmbH & Co KG** for damage claims of any kind whatsoever is limited to particularly wilful negligence and intent. This does not however apply in the event of injury to persons. No liability is accepted for consequential damage, indirect damage or accompanying damage. All claims for damage on the part of the customer against **ISOCELL GmbH & Co KG** are limited by statute to maximum 3 years after delivery of the goods, even in the event that faults are identified at a later date. The buyer and/or the customer waives the right to claim compensation from **ISOCELL GmbH & Co KG** for warranty that has taken place and also for damage governed by the product liability law. The customer undertakes to impose the aforementioned waiver to every further company and to indemnify and hold harmless **ISOCELL GmbH & Co KG** against such claims by others.

11. Exclusion of set-off

The customer expressly waives compensation for any counterclaims against **ISOCELL GmbH & Co KG** for claims to which he is entitled.

12. Jurisdiction and applicable law

Unless the application of the laws of another country is mandatory, this contract is subject to the laws of the Republic of Austria to the exclusion of the provisions of the UN Convention on Contracts for the International Sale of Goods and the conflict rules of the Austrian international private laws. The Parties are agreed that the exclusive place of jurisdiction for any disputes arising from this contract is the court of law responsible for 5202 Neumarkt am Wallersee, Austria. The purchaser declares that he is an entrepreneur as defined in KSchG (Austrian Consumer Protection Act) and that he is purchasing the purchase object for entrepreneurial purposes so that the provisions of the KSchG do not apply.

13. Data protection

The customer gives his express consent for **ISOCELL GmbH & Co KG** to collect, process and use the personal data, in particular contact and address data, real estate and financial data (VAT Reg.No., Tax ID), required for the execution and execution of this contract; this is done in compliance with the data protection regulations and other legal provisions applicable under the General Data Protection Regulation (GDPR).

ISOCELL GmbH & Co KG will store the aforementioned personal data for the duration of the execution of this contract, but in any case for the duration of the statutory storage obligations.

In connection with the personal data collected, processed and used by **ISOCELL GmbH & Co KG**, the purchaser is entitled (insofar as legally applicable) to the rights of information, correction, deletion, restriction, data transferability and objection. These rights can be asserted directly against the seller (by e-mail at office@isocell.at or by post to the address indicated on the cover sheet). It is possible to lodge a complaint with the Austrian Data Protection Authority.

14. Written form of the declaration

Verbal side-agreements have not been made. The cancellation, modification or amendment of the terms and conditions must be made in writing and signed by all parties. This shall also apply to any waiver of this formal requirement.

15. Salvatory clause

Should any part of this agreement contradict any existing law or be invalid for any reason, the rest of the agreement shall remain unaffected and valid. The invalid provision is to be replaced by a valid provision which is as close as possible to the economic equivalent of the intended aim.

Issued October 2019

ISOCELL GmbH & Co KG

Gewerbestrasse 9
5202 Neumarkt am Wallersee


☎ +43 6216 4108-0


☎ +43 6216 4108-88 (Order)


✉ office@isocell.at 🌐 WWW.ISOCELL.COM

🕒 MONDAY – THURSDAY 07:30 – 12:00
 13:00 – 17:00

FRIDAY 07:30 – 12:00

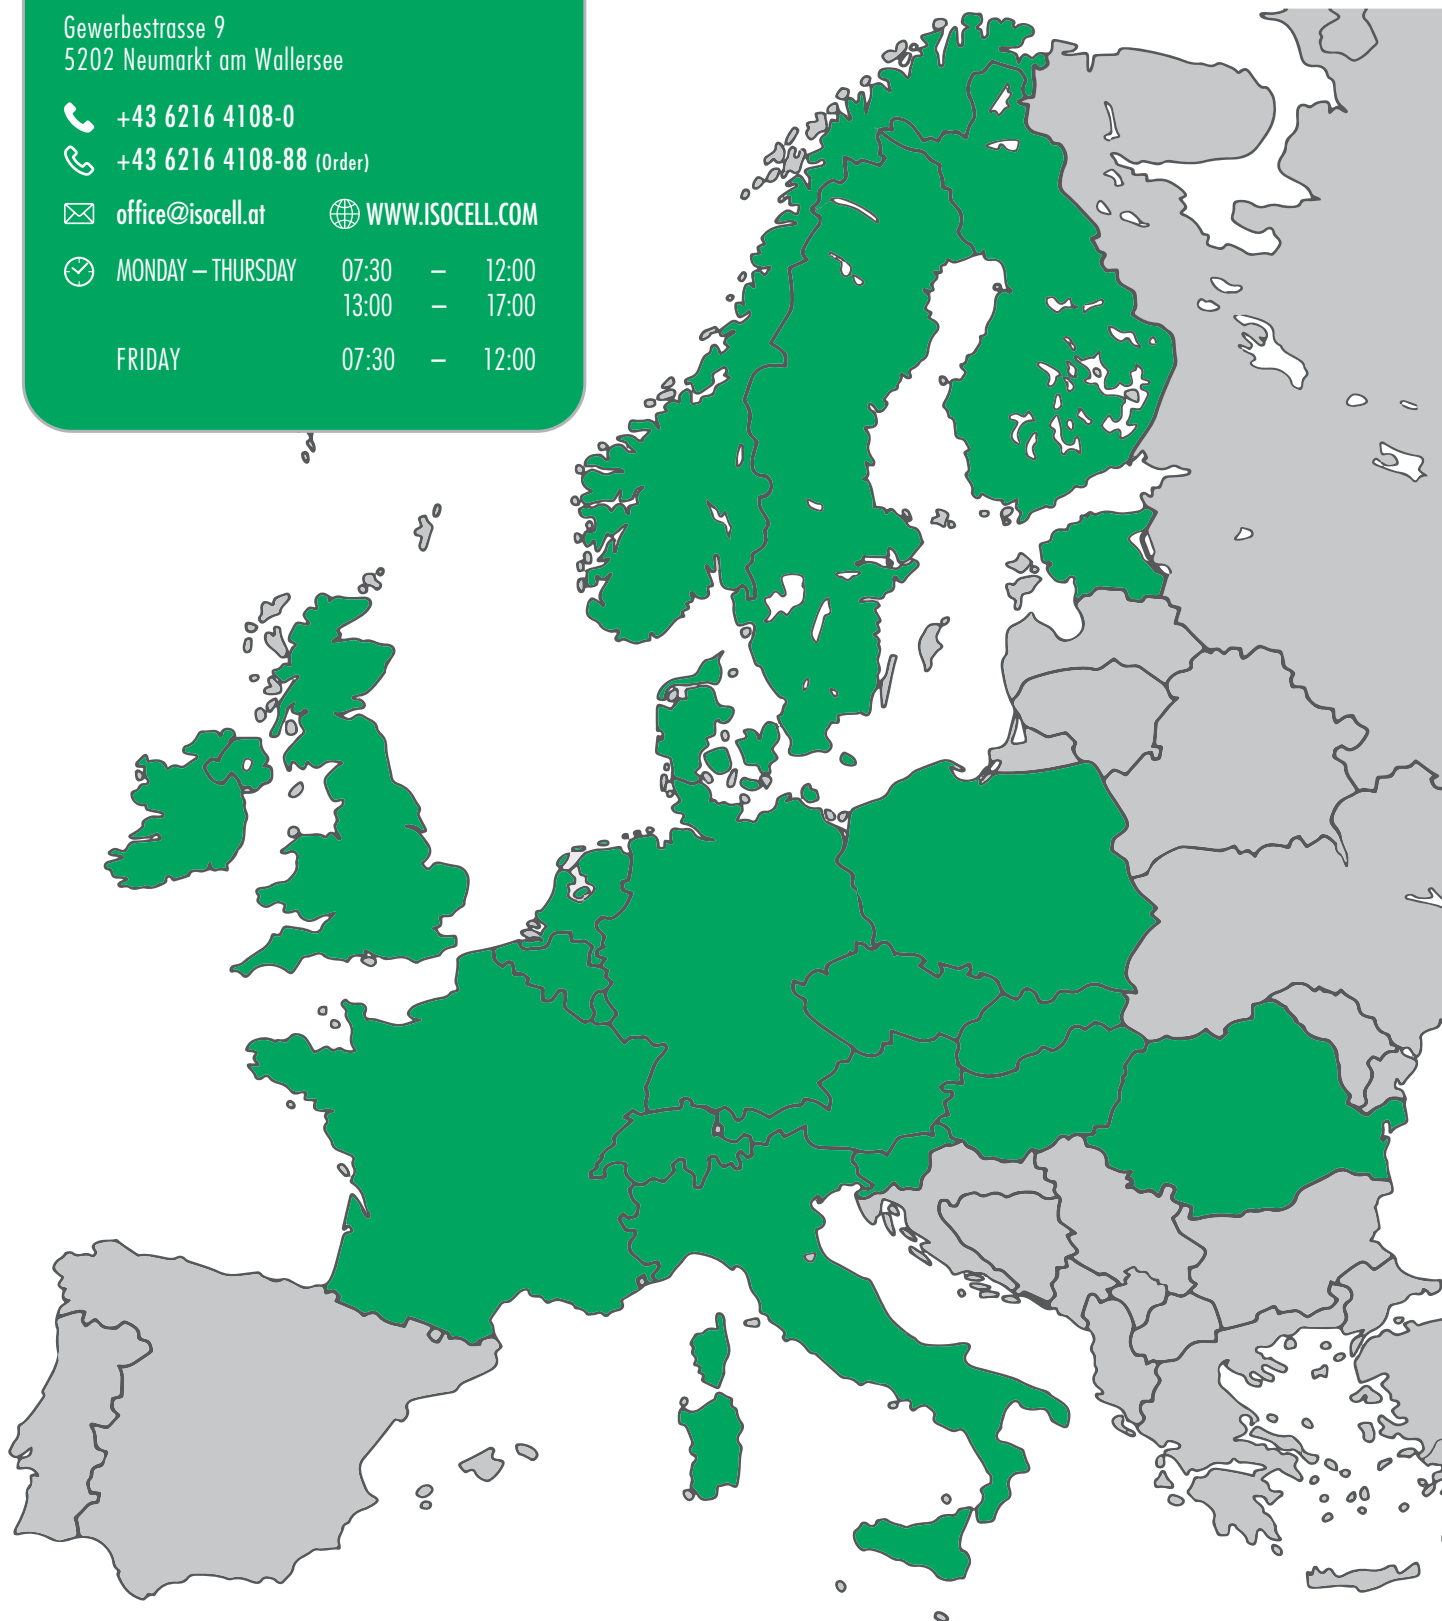

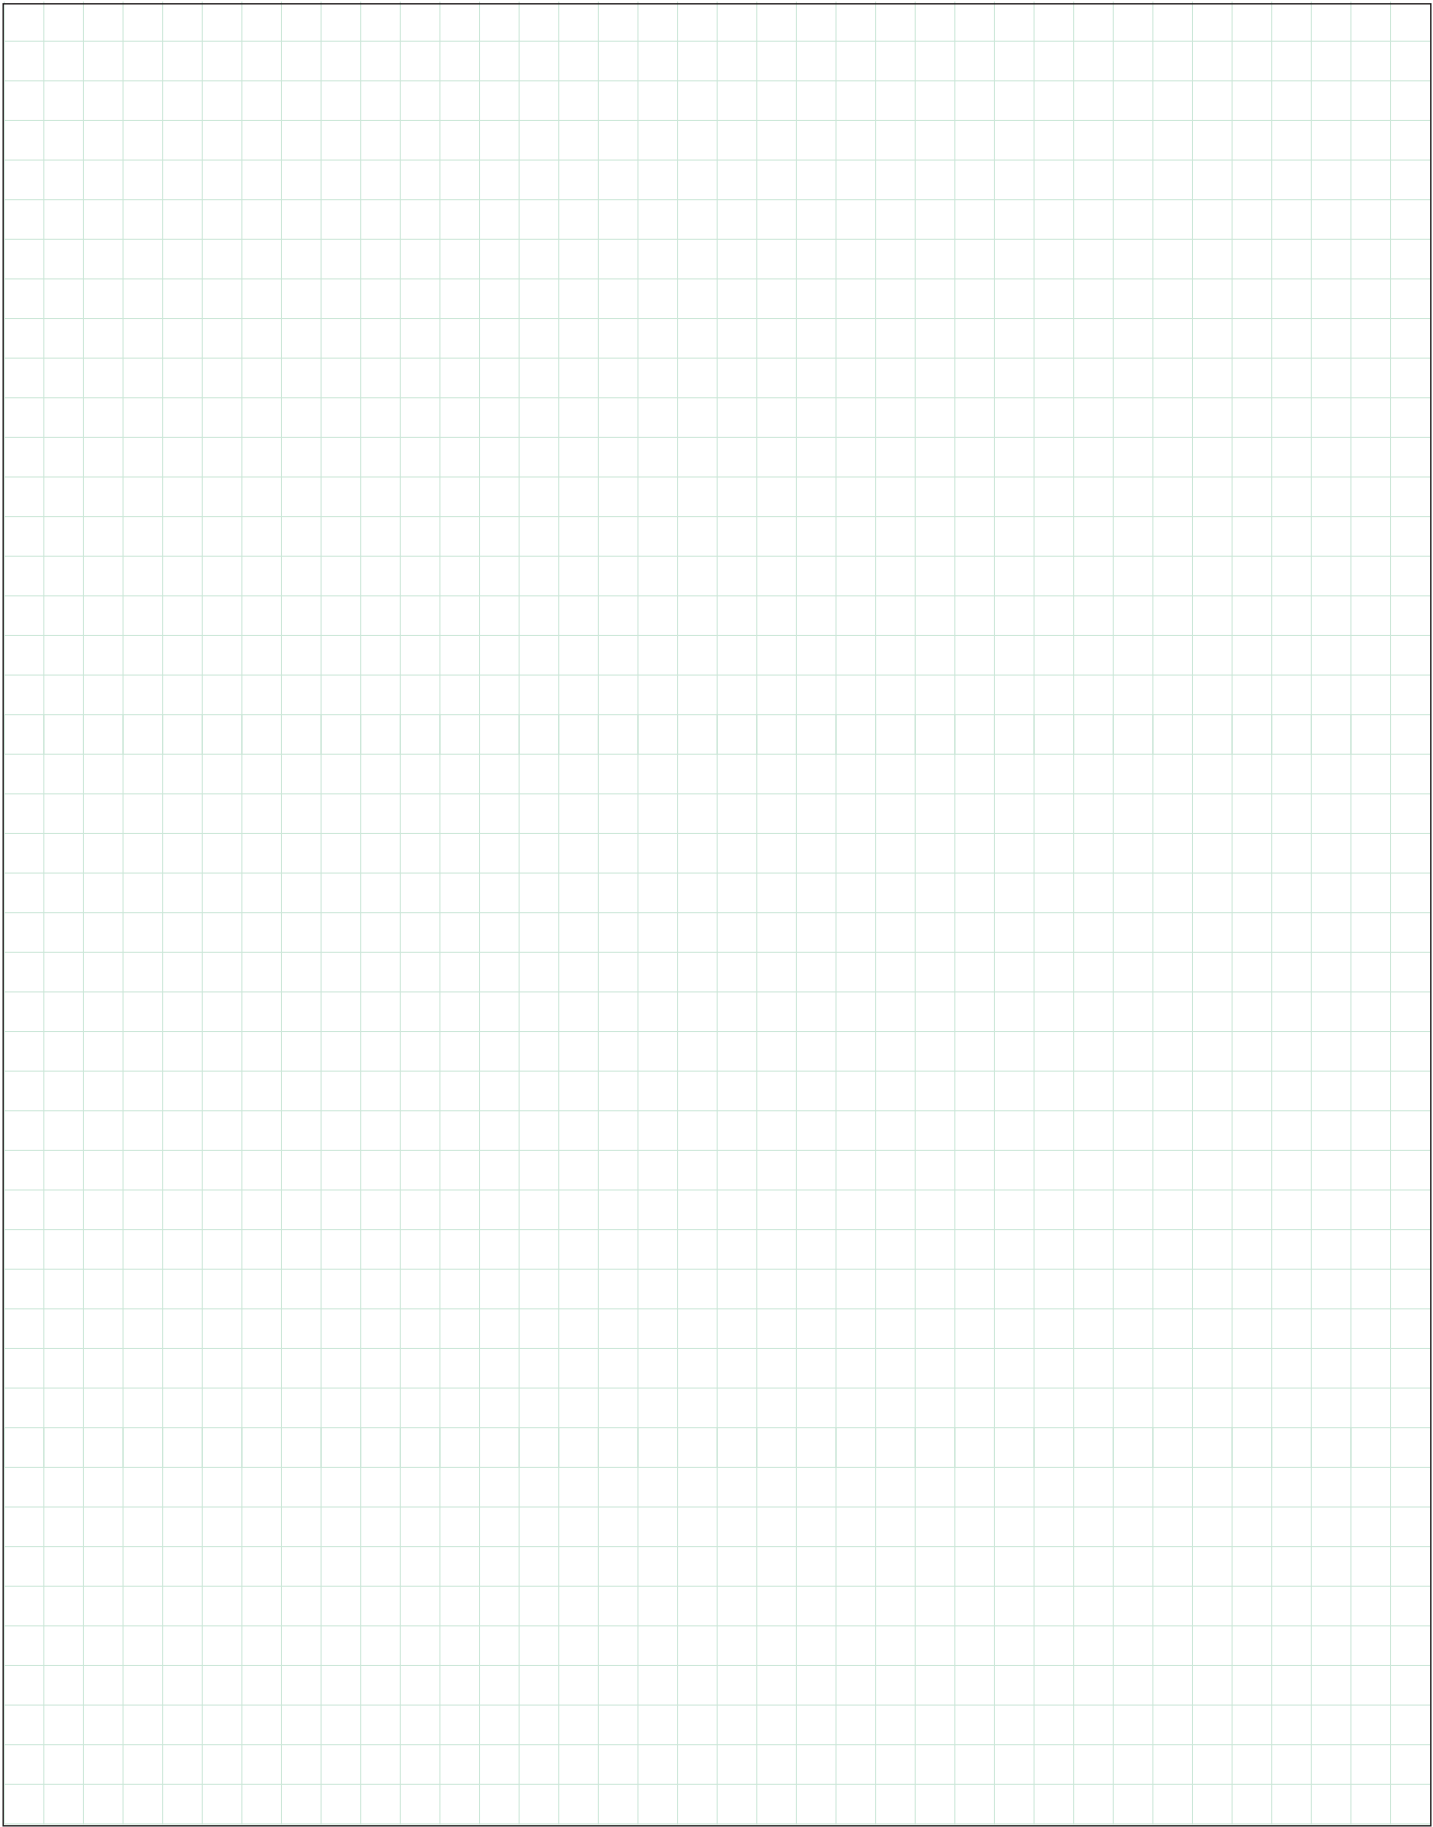

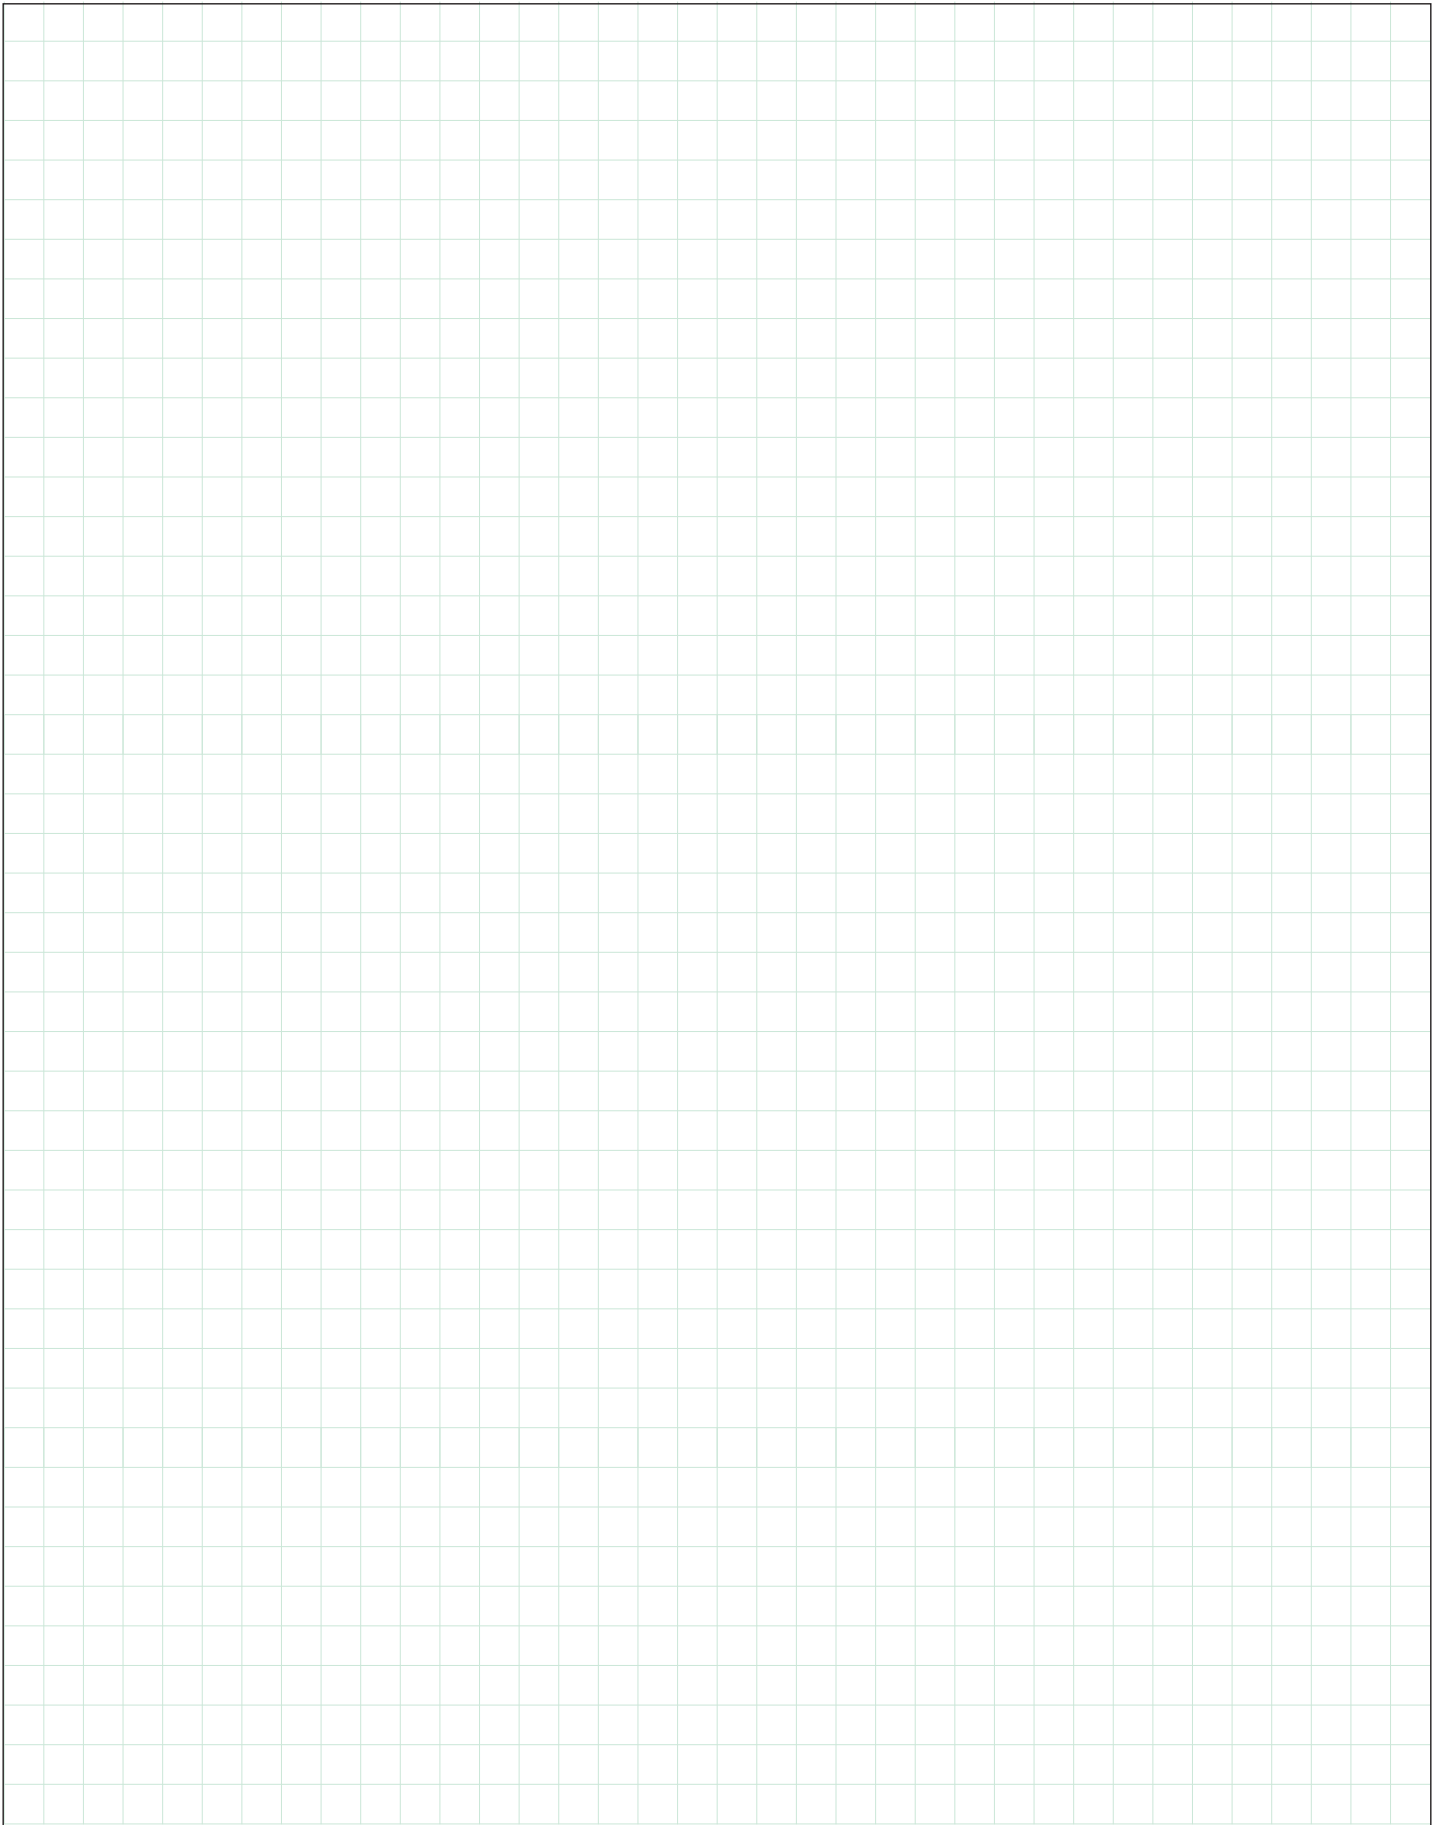



23

ISOCELL GmbH & Co KG

Gewerbestraße 9
5202 NEUMARKT AM WALLERSEE | Österreich
Tel.: +43 6216 4108-0
office@isocell.at

ISOCELL SCHWEIZ AG

Herbergstrasse 29
9524 ZUZWIL | Suisse /Schweiz
Tel.: +41 71 940 06 72
office@isocell.ch

ISOCELL FRANCE

170 Rue Jean Monnet | ZAC de Prat Pip Sud
29490 GUIPAVAS | France
Tél.: +33 2 98 42 11 00
contact@isocell-france.fr

ISOCELL BUREEL BELGIË

Außenborner Weg 1 | Schoppen
4770 AMEL | Belgique
Tel.: +32 80 39 90 58
office@isocell.be

ISOCELL Sverige AB

Torshamnsgatan 35
164 40 KISTA | Sverige
Tel.: +46 10 130 25 00
info@isocell.se

ISOCELL